



XCA300H全地面起重机 / All Terrain Crane

技术规格书


Technical specifications



300 t



82 m



118 m



2022年2月 第1版
1st edition, February 2022

目录


Contents


目录

Contents

尺寸参数 Dimensions	4
技术规格 Technical specifications	5-10
车型与选装件 Version and optional equipment	11
重量/作业速度 Weight / Working speeds	12-13
运输部件尺寸 Dimensions of parts to be transported	14-16
平衡重 Counterweight	17
臂架组合方案 Boom / Jib combinations	18-22
主臂 Boom	23-29
主臂超起 Boom + super lifting device	30-32
固定副臂 Fixed Jib	33-46
超起固定副臂 Super lifting device + fixed Jib	47-60
符号标识 Description of symbols	61
主要技术参数表 Table of main technical parameters	62-63
注意事项 Notes	64

尺寸参数 Dimensions

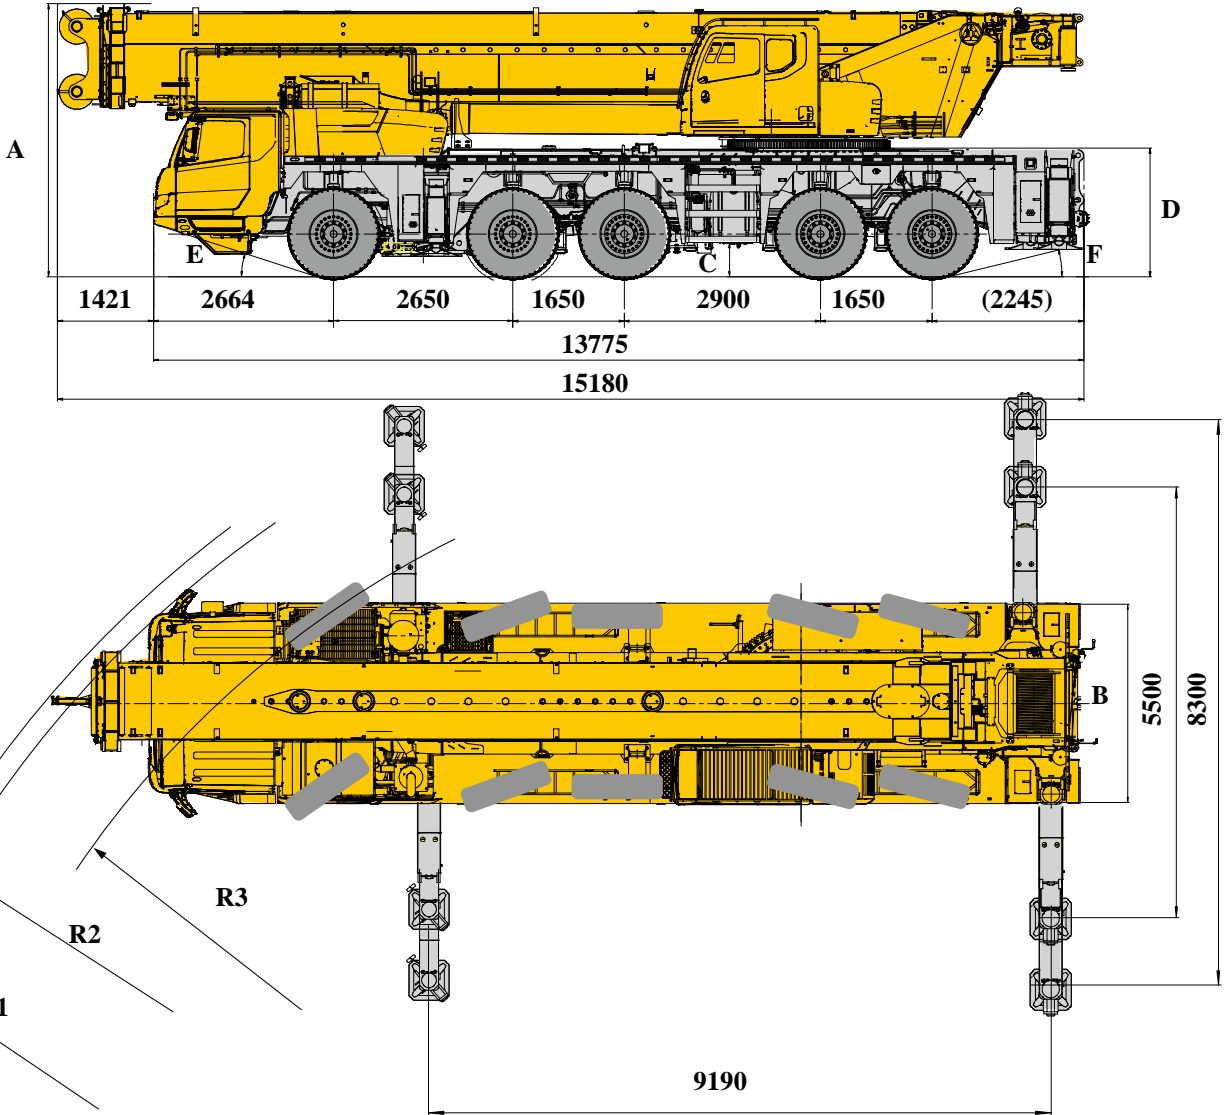


	A(mm)	B(mm)	C(mm)	D(mm)	E (°)	F (°)	R1	R2	R3
385/95R25 (14.00R25)	4000	3000	307	1905	18	14	10750	10500	9250
445/95R25 (16.00R25)	4000	3000	337	1905	18	14	10750	10500	9250

备注：装445/95R25轮胎时需要将悬挂降低50mm

Remark: The suspension needs to be lowered by 50 mm when equipped with 445/95R25 tires.


技术规格

Technical specifications

	底盘	车桥	重庆大江车桥，配盘式制动器。		
车架	徐工设计、制造，全覆盖式走台板，防扭转箱型结构，高强度钢材制造。	悬挂	所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。		
支腿	4支腿，H形布置，采用双级水平支腿，水平伸缩和垂直伸缩由液压控制，底盘两侧装有电控操纵控制台，控制台板装有水平仪、照明灯和调速按钮，支腿油缸均设有单向阀，且垂直支腿带有双向液压锁。 支脚盘尺寸： 最大起重量时支腿反力：	轮胎	10个轮胎，1个备胎，每桥均装单胎，双钱制造，承载力大。 <table border="1"><tr><td>445/95R25 (16.00R25)</td></tr><tr><td>385/95R25 (14.00R25)</td></tr></table>	445/95R25 (16.00R25)	385/95R25 (14.00R25)
445/95R25 (16.00R25)					
385/95R25 (14.00R25)					
发动机	WP13.530E501，直列六缸水冷电控柴油发动机，潍柴制造，额定功率390kW/1900rpm，最大扭矩2500Nm/1000-1400rpm，欧5排放标准； 燃油箱容积：592L	制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-5轴车轮。 辅助制动：发动机排气制动和缓速制动，变速箱缓速制动，安全可靠，延长制动摩擦片使用寿命。		
液压系统	泵组直接连接在发动机的取力口上，用于支腿、转向、悬挂和独立液压散热。	转向	全桥转向，采用先进的电液比例转向控制技术，可适应多种工况的要求，实现多种转向模式。		
变速箱	德国ZF自动变速箱，12个前进档，2个倒档带缓速制动。	驾驶室	新型钢结构豪华全宽驾驶室，采用悬浮式连接结构，后部装有减震器。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，倒车显示器、大屏幕彩色液晶显示器和CD音响等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。 标配冷暖空调。		
分动箱	株齿机械式分动箱，装有应急转向油泵。	电气系统	直流24伏特，2个电池串联。		

技术规格

Technical specifications

	上车	
结构	徐工设计、制造，高强度钢材制造。	
液压系统	下车发动机通过传动装置驱动变量泵，用于起升、变幅、伸缩和回转。采用进口电液换向阀，与变量柱塞泵进行良好的匹配，启停平稳，风冷式液压油冷却器，有效降低系统油温。	
操纵方式	先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的主要动作。	
起升机构	双折线绳槽卷筒，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，并带有平衡阀。钢丝绳端带绳头，直接安装于索套内，提高了更换速度，方便快捷。	
回转机构	单排四点接触球外齿式回转支承，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由滑转的功能，可无级调速	
操纵室	带大视野玻璃，推拉式门，可调式座椅，可翻仰20°，装有安全玻璃和顶部保护栏，发动机动力加速踏板、发动机起动开关、前窗遮阳帘等。标配冷暖空调。	
		安全装置 液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷；风速仪，检测高空风速；卷扬监视装置，实时监控卷扬状态。
		力矩限制器 当实际力矩接近过载时，发出听视觉警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。
		组合配重 总重90t：含10t×6，9t×2，6t×2，
		电气系统 直流24伏特，2个电池串联。
		吊钩 11吨吊钩 35t吊钩 75t吊钩
		无线遥控装置 进行起重机配重拆装操作，提高操作的方便性及安全性

技术规格

Technical specifications



臂架系统

主臂	<p>8节，“U”形截面的筒形焊接结构。单缸插销伸缩机构，1个装有安全阀的双作用的伸缩油缸，控制每节臂的伸缩，多种伸缩模式可供选择。</p> <p>主臂长度：13.8m~82m。</p>
副臂	<p>桁架式结构、有0°、20°和40°三种安装角度。</p> <p>主臂副臂包含8种组合形式（12、16、20、24、28、28、32、36、40）</p> <p>主臂超起副臂包含9种组合形式（16、20、24、28、28、32、36、40、44）</p> <p>4m主臂加长节</p> <p>连接架</p> <p>旋转架</p> <p>两节副臂</p> <p>4m加长节</p> <p>8m加长节</p>
超起	<p>Y型，安装在基本臂端部，单倍率超起钢丝绳设计。</p>
臂端单滑轮	<p>单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，起重性能与主臂相同，但最大起重量不超过10.9t。</p>

技术规格

Technical specifications




Chassis

Frame	Designed and manufactured by XCMG, it is made of high strength steel with fully covered walking surface and anti-torsion box-typed structure.
Outriggers	Four outriggers arranged in H-shape are hydraulically controlled by control levers. Double-stage outrigger beam is adopted. There is an outrigger control station located at each side of the chassis, and there is a level gauge, an illuminator and two speed buttons on each control station. There is a check valve fitted in each outrigger cylinder, and a double-way hydraulic valve fitted in each jack cylinder.
Engine	WP13.530E501, in-line, 6-cylinder, water cooled, electric control diesel engine, made by Weichai, with rated power of 390 kW/1900 rpm and max. torque of 2500 Nm/1000-1400 rpm, compliant to Euro V emission standard. Fuel tank capacity: 592 L
Hydraulic system	The pump group is connected to the PTO of the engine for controlling the movements of outriggers, steering, suspension and independent cooling for hydraulic system.
Transmission	German ZF automatic transmission with retarder brake; 12 forward gears and 2 reverse gears available.
Transfer gear	Mechanical transfer gear made by Zhuzhou Gear Co., Ltd., equipped with emergency steering pump.

Axles	Axles made by Chongqing Dajiang, equipped with disc brake.	
Suspensions	Hydro-pneumatic suspension system has good shock-absorbing effect. Various functions such as automatic leveling, moving up and down of suspension, and switching over of elastic and rigid suspension are available.	
Tires	10 tires and 1 spare tire, each axle is equipped with single tire, manufactured by Double Coin, with large bearing capacity.	445/95R25 (16.00R25) 385/95R25 (14.00R25)
Brakes	Service brake: dual-circuit air pressure brake, acting on all wheels. Parking brake: spring-loaded brake, acting on the wheels of 2nd-5th axles. Auxiliary brake: engine exhaust brake and retarder brake, transmission retarder brake, safe and reliable, and will prolong the service life of brake lining.	
Steering	All axles steering, advanced technology of electro-hydraulic proportional steering control is suitable for various demands of working conditions and several steering modes can be realized.	
Driver's cab	Full dimension steel structure luxury cab has suspension connection structure and rear damper, and is equipped with adjustable seats, safety glass, electrically operated door window lifter, electric-adjustable mirrors, steering wheel adjustable in height and angle, reverse displayer, large screen liquid crystal display and CD player, etc. New combined central control panel is reasonably arranged with arc shape adopted, presenting human-oriented design concept. Heater and air conditioner are equipped as a standard.	
Electrical system	DC 24 V, two batteries in series.	

技术规格

Technical specifications

	Superstructure
Frame	Designed and manufactured by XCMG, made of high strength steel.
Hydraulic system	Variable pump driven by chassis engine, used for hoisting, luffing, telescoping and slewing operation. Imported electro-hydraulic change valve, matching perfectly and stably with plunger variable pump. Air-cooled hydraulic oil cooler may effectively reduce the oil temperature in the system.
Control system	The pilot electric proportional control system is equipped with two levers at left and right sides controlling the main movements of the crane, and stepless slewing speed regulation is available.
Winch system	Drum with Lebus grooves, driven by a hydraulic motor, with build-in planetary gear reducer, constant closed brake and balance valve. Wire rope has a rope head, which is directly installed in pouch socket. Time for replacing wire rope is shortened, the replacement is easy and fast.
Slewing system	A single-row, four-point contact-ball external toothed slewing bearing is driven by hydraulic motor, with built-in planetary gear reducer and constant-closed brake equipped, and may continuously slew 360°. Power control and free slewing function as well as stepless speed regulation are available.
Operator's cab	Windshield offering outstanding visibility, sliding door, adjustable seat with 20° tilting are adopted. Safety glass and top protective rails, engine accelerator pedal, engine start switch and windshield visor, etc. are also available. Heater and air conditioner are equipped as a standard.

Safety devices	Hydraulic counterbalance valve, hydraulic relief valve, hydraulic double-way valve and LMI are available. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding. Anemometer is equipped to check whether aerial wind velocity is in safe working range. Winch monitor is for real-time monitoring of winch running.
LMI	When the actual load moment is approaching overloading value, audible and visual warning will be sent out, and the dangerous operation will be automatically stopped ahead of overloading. Overload memory function (black box) and fault self-diagnosis function are available.
Combined counterweight	Total weight is 90 t, including 10 t×5, 9 t×2, 6 t×2, 10 t (additional counterweight)
Electrical system	DC 24 V, two batteries in series.
Hook block	11 t hook block 35 t hook block 75 t hook block
Wireless remote controller	Carrying out the installation or removal of counterweight to improve the convenience and security of operation.

技术规格

Technical specifications



Boom system

Boom	8-section boom with U cross-section, welding structure. Single-cylinder pinning telescoping system is adopted. One double-acting cylinder with safety valve is used for controlling the telescoping movements of all boom sections with various telescoping pattern available. Boom length: 13.8 m~82 m.
Jib	Lattice structure with 0°, 20° and 40° jib offset angles available. There are 8 jib combinations available for boom+jib working conditions: 12, 16, 20, 24, 28, 32, 36, 40. There are 9 jib combinations available for boom+super lifting device+jib working conditions: 12, 16, 20, 24, 28, 32, 36, 40, 44. Boom extension of 4 m Connecting bracket Swinging bracket Two jib sections Jib extension of 4 m Jib extension of 8 m
Super lifting device	Y-shaped, installed at top of base boom, with wire rope with single parts of line available.
Single top	Installed at the boom top, used for single line operation. Its lifting performance is the same as that for boom, but the max. lifting load does not exceed 10.9 t.

车型与选装件

Version and optional equipment

车型 Version	功能描述 Function description	选择 Selection
标准型 Standard	主臂+副臂安装包+平衡重90t, 八节主臂82m副臂40m Boom + jib installation package + 10 t additional counterweight, 8-section boom of 82 m, jib of 40 m	
增强型 Strengthened	主臂+超起+副臂安装包+翼式连接架+平衡重90t, 八节主臂82m副臂44m Boom + super lifting device + jib installation + wing-type connecting bracket+ 10 t additional counterweight, 8-section boom of 82 m, jib of 44 m	

注释: 副臂安装包内包含主臂加长节、旋转架、一、二节副臂, 加长节I、加长节II

Note: Jib installation package contains boom extension, swinging bracket, 1st and 2nd jib sections, extension I and extension II.

可选装件 Optional equipment		选择 Selection
轮胎 Tire	14.00R25子午线轮胎 (国产) 14.00R25 Radial tires (made in China)	
吊钩 Hook block	150t起重钩 150 t hook block	

OBU装置

OBU device

注释: 可选装件为通用可选, 两种车型都可选择。

可选的轮胎在备件销售部购买, 不在购买车型上装配。

Notes: The options are available for two versions.

The optional tires can be purchased in XCMG spare parts sales department.

重量 Weight



车桥 Axle	1	2	3	4	5	总重量 Total weight
t	10.29	10.35	10.35	12	12	54.99 ¹⁾
t	14.8	14.8	14.8	12.7	12.7	69.8 ²⁾
t	16.6	16.6	16.6	15	15	79.8 ³⁾
t	19.1	19.1	19.1	12.1	12.1	81.5 ⁴⁾

1) 上车不带3-8节主臂、平衡重、臂端单滑轮、超起、起重吊钩、副臂、平台及护栏；底盘不带备胎及支架
全桥转向；驱动形式：10x8；2、3、4、5桥驱动；轮胎规格：445/95R25

1) Superstructure: the 3rd-8th boom sections, counterweight, single top, super lifting device, hook block, jib, platform and guardrails are excluded; Chassis: the spare tire and its bracket are excluded.

All axles steering; Driving mode:10x8; The 2nd, 3rd, 4th and 5th axles are for driving; Tire specifications: 445/95R25

2) 上车带3-8节主臂，不带平衡重、臂端单滑轮、超起、起重吊钩、副臂、平台及护栏；底盘带备胎及支架
全桥转向；驱动形式：10x8；2、3、4、5桥驱动；轮胎规格：445/95R25

2) Superstructure: the 3rd-8th boom sections are carried, the counterweight, single top, super lifting device, hook block, jib, platform and guardrails are excluded; Chassis: the spare tire and its bracket are carried.

All axles steering; Driving mode:10x8; The 2nd, 3rd, 4th and 5th axles are for driving; Tire specifications: 445/95R25

3) 上车带3-8节主臂、10t平衡重底座，不带平衡重、臂端单滑轮、超起、起重吊钩、副臂、平台及护栏；底盘带备胎及支架

全桥转向；驱动形式：10x8；2、3、4、5桥驱动；轮胎规格：445/95R25

3) Superstructure: the 3rd-8th boom sections and 10 t counterweight base are carried, the counterweight slabs, single top, super lifting device, hook block, jib, platform and guardrails are excluded; Chassis: the spare tire and its bracket are carried.

All axles steering; Driving mode:10x8; The 2nd, 3rd, 4th and 5th axles are for driving; Tire specifications: 445/95R25

4) 上车带3-8节主臂、超起，不带平衡重、臂端单滑轮、起重吊钩、副臂、平台及护栏；底盘带备胎及支架
全桥转向；驱动形式：10x8；2、3、4、5桥驱动；轮胎规格：445/95R25

4) Superstructure: the 3rd-8th boom sections and super lifting device are carried, the counterweight, single top, hook block, jib, platform and guardrails are excluded; Chassis: the spare tire and its bracket are carried.

All axles steering; Driving mode:10x8; The 2nd, 3rd, 4th and 5th axles are for driving; Tire specifications: 445/95R25

表中整车重量及桥荷为装配445/95R25轮胎的值；选装385/95R25轮胎时，整车重量减少600kg，各轴荷减少120kg；

The GVW and axle loads listed in the table are the values when 445/95R25 tires are equipped; when equipped with optional tires 385/95R25, the GVW is reduced by 600 kg and the axle load for each axle is reduced by 120 kg.



吊钩 Hook block	倍率 Parts of lines	吊钩重量 Weight (kg)	备注 Remarks
150t	14	1900	双钩 Double hook, 选配Optional
75t	7	1000	双钩 Double hook, 标配Standard
35t	3	700	单钩 Single hook, 标配Standard
11t	1	460	单钩 Single hook, 标配Standard

作业速度 Working speeds



385/95 R 25
(14.00 R 25)
445/95 R 25
(16.00 R 25)



1 ~ 80





1 ~ 80



60%

60%



作业机构 Operation mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-130 m/min, 单绳, 第四层 m/min, single line, 4th layer	107 kN	22 mm/390 m
	0-1.5 r/min		
	从0°抬起至82°约60s Approx. 60 s for boom luffing from 0° to 82°		
	从13.8m伸出至82m约850s Approx. 850 s for boom extending from 13.8 m to 82 m		

运输部件尺寸

Dimensions of parts to be transported

名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
3~8节主臂 3rd-8th boom sections		14800	1	13300×1970×2050
超起装置 Super lifting device		11500	1	7601710×0×1350
臂端单滑轮 Single top		141	1	960×560×850
扶梯 Ladder		10.33	2	691×410×265
左侧平台 Left platform		10.6	1	717×972×130
右侧平台 Right platform		10.6	1	717×972×130
护栏 Guardrail		7.29	2	1150×988×150
备胎 Spare tire (385/95R25)		201	1	1360×1360×385
备胎支架 Spare tire bracket		53	1	1952×332×375











运输部件尺寸

Dimensions of parts to be transported


名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
翼型连接架 Wing-type connecting bracket		1080	1	4000×1780×1950
主臂加长节 Boom extension		510	1	4000×1120×1480
旋转架结构 Swinging bracket		1160	1	5000×1235×1820
加长节I Extension I		535	1	8000×830×1140
加长节II Extension II		320	2	4000×830×1140
一节副臂总成 1st jib section assembly		560	1	7500×830×1000
二节副臂总成 2nd jib section assembly		400	1	8000×500×760
平衡重A Counterweight slab A		10000	1	2990×2350×1024
平衡重B Counterweight slab B		10000	2	3500×2350×223
平衡重C Counterweight slab C		10000	1	3500×2350×232

运输部件尺寸

Dimensions of parts to be transported

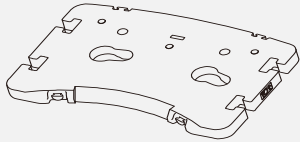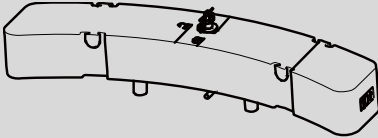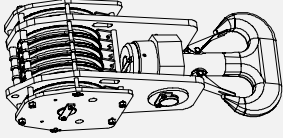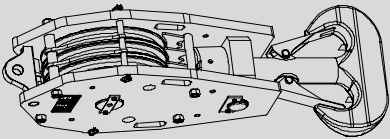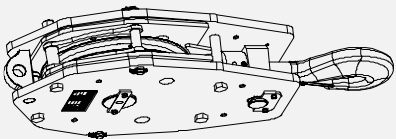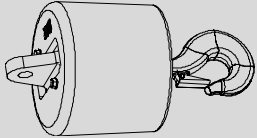名称 Part Name	图示 Figure	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
平衡重D Counterweight slab D		10000	1	3500×2300×216
平衡重E Counterweight slab E		9000	1	2207×950×1008
平衡重F Counterweight slab F		9000	1	2207×950×1008
平衡重G Counterweight slab G		6000	1	1601×990×1008
平衡重H Counterweight slab H		6000	1	1601×990×1008
平衡重I Counterweight slab I		10000	1	4000×1118×874
150t起重钩 150 t hook block		1900	1	900×600×2000
75t起重钩 75 t hook block		1000	1	500×400×1900
35t起重钩 35 t hook block		700	1	400×300×1500
11t起重钩 11 t hook block		460	1	500×500×750

平衡重 Counterweight

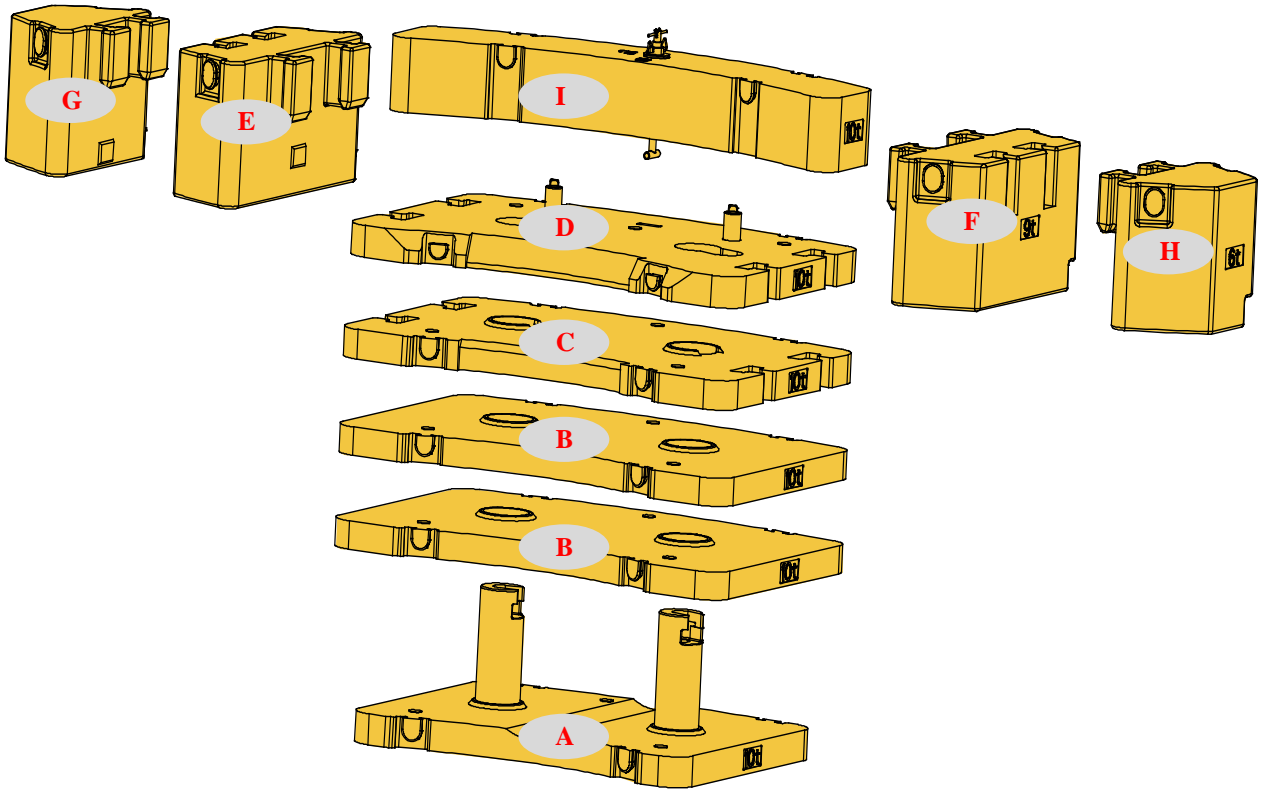


平衡重 Counterweight	A	B	C	D	E	F	G	H	I
尺寸 (长×宽×高) mm Dimensions (L×W×H) (mm)	2990*2350 *1024	3500*2350 *223	3500*2350 *232	3500*2300 *216	2207*950 *1008	2207*950 *1008	1601*990 *1008	1601*990 *1008	4000*1118 *510
重量 t Weight (t)	10	10	10	10	9	9	6	6	10

工况模式 Working mode	90t	80t	68t	50t	40t	30t	20t	10t
组合形式 Combinations	A+B×2+C+D +E+F+G+H+I	A+B×2+C+D +E+F+G+H	A+B×2+ C+D+E+F	A+B×2+ C+D	A+B×2+ C	A+B×2	A+B	A

臂架组合方案

Boom / Jib combinations

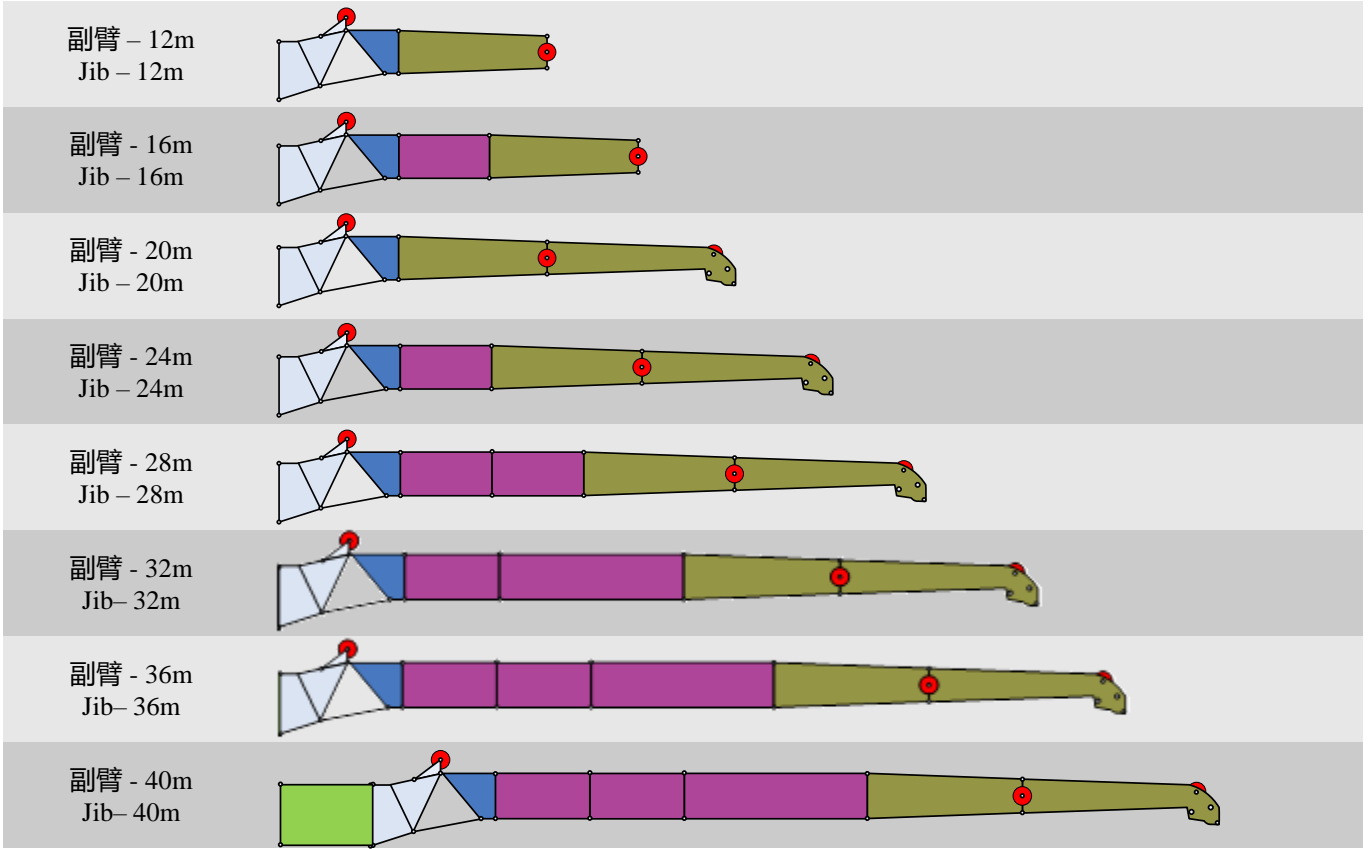


备注：不带超起工况使用该副臂组合

Note: The above jib combinations are used for working conditions without super lifting device.

臂架组合方案

Boom / Jib combinations

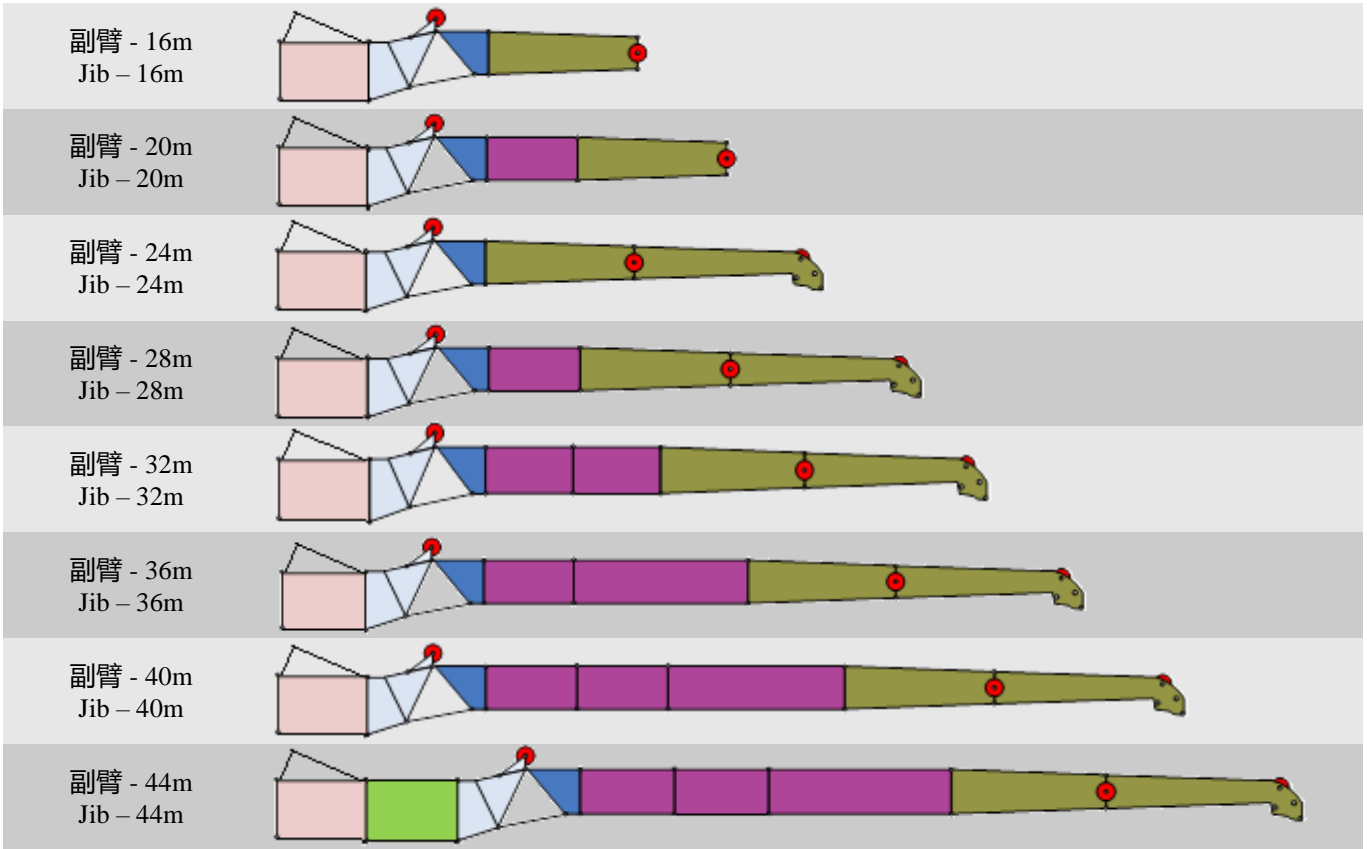









备注：带超起工况使用该副臂组合

Note: The above jib combinations are used for working conditions with super lifting device.


臂架组合方案

Boom / Jib combinations

部件 Component	结构形式 Structure	尺寸 (长×宽×高) mm Dimensions (L×W×H) (mm)	重量 kg Weight (kg)
连接架 Connecting bracket		1650×1000×2300	320
旋转架 Swinging bracket		3610×950×1350	390
主臂加长节 Boom extension		4150×1000×1660	500
一节副臂总成 1st jib section assembly		7700×950×1100	700
二节副臂总成 2nd jib section assembly		8000×600×700	400
副臂加长节 I Jib extension I		8200×950×1100	560
副臂加长节 II Jib extension II		4200×950×1100	320
翼式连接架 Wing-type connecting bracket		4150×1950×1955	1100


臂架组合方案

Boom / Jib combinations

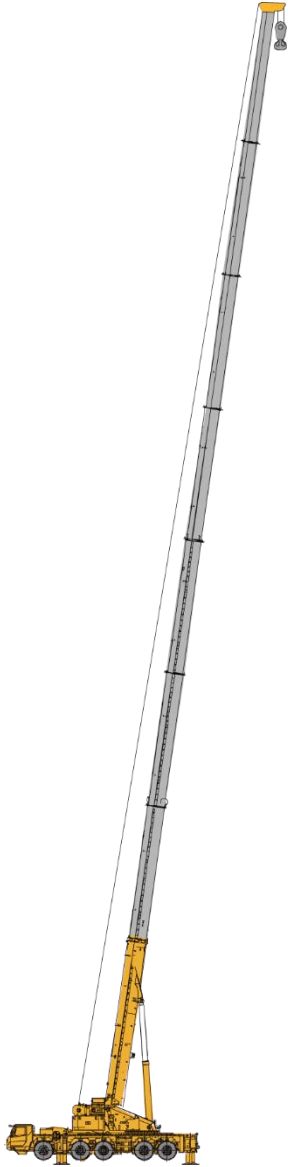

主臂
Boom

T: 13.8~82m

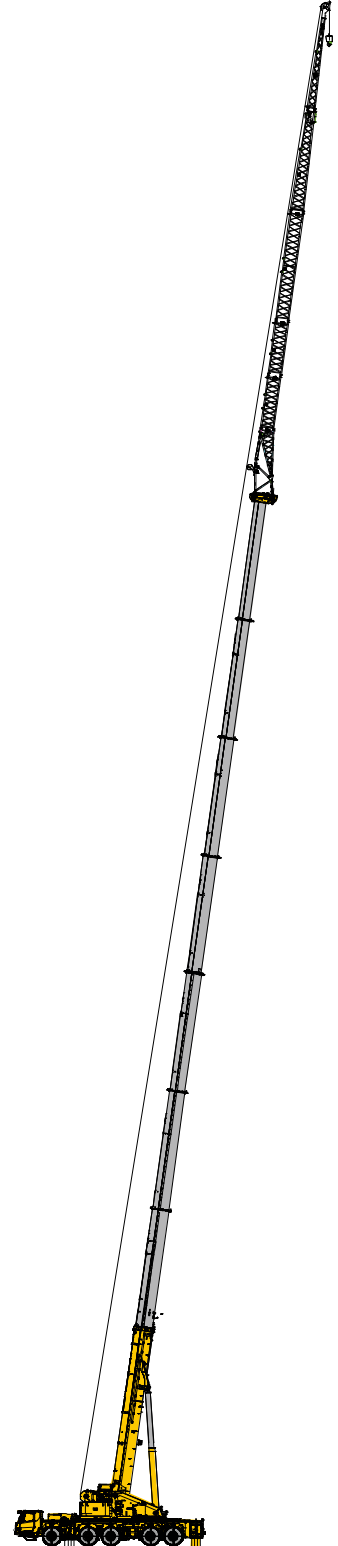


固定副臂
Fixed Jib

T: 63.1~82m
V: 4m
J: 12~36 m

臂架组合方案

Boom / Jib combinations

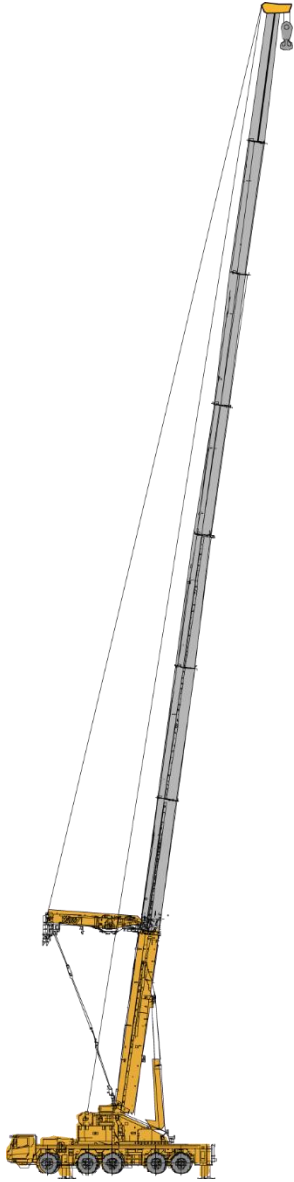

主臂+超起
Boom + super lifting device

T: 13.8~82m




超起+固定副臂
Super lifting device + fixed Jib

T: 63.1~82m

V: 4m, 8m

J: 12~36 m

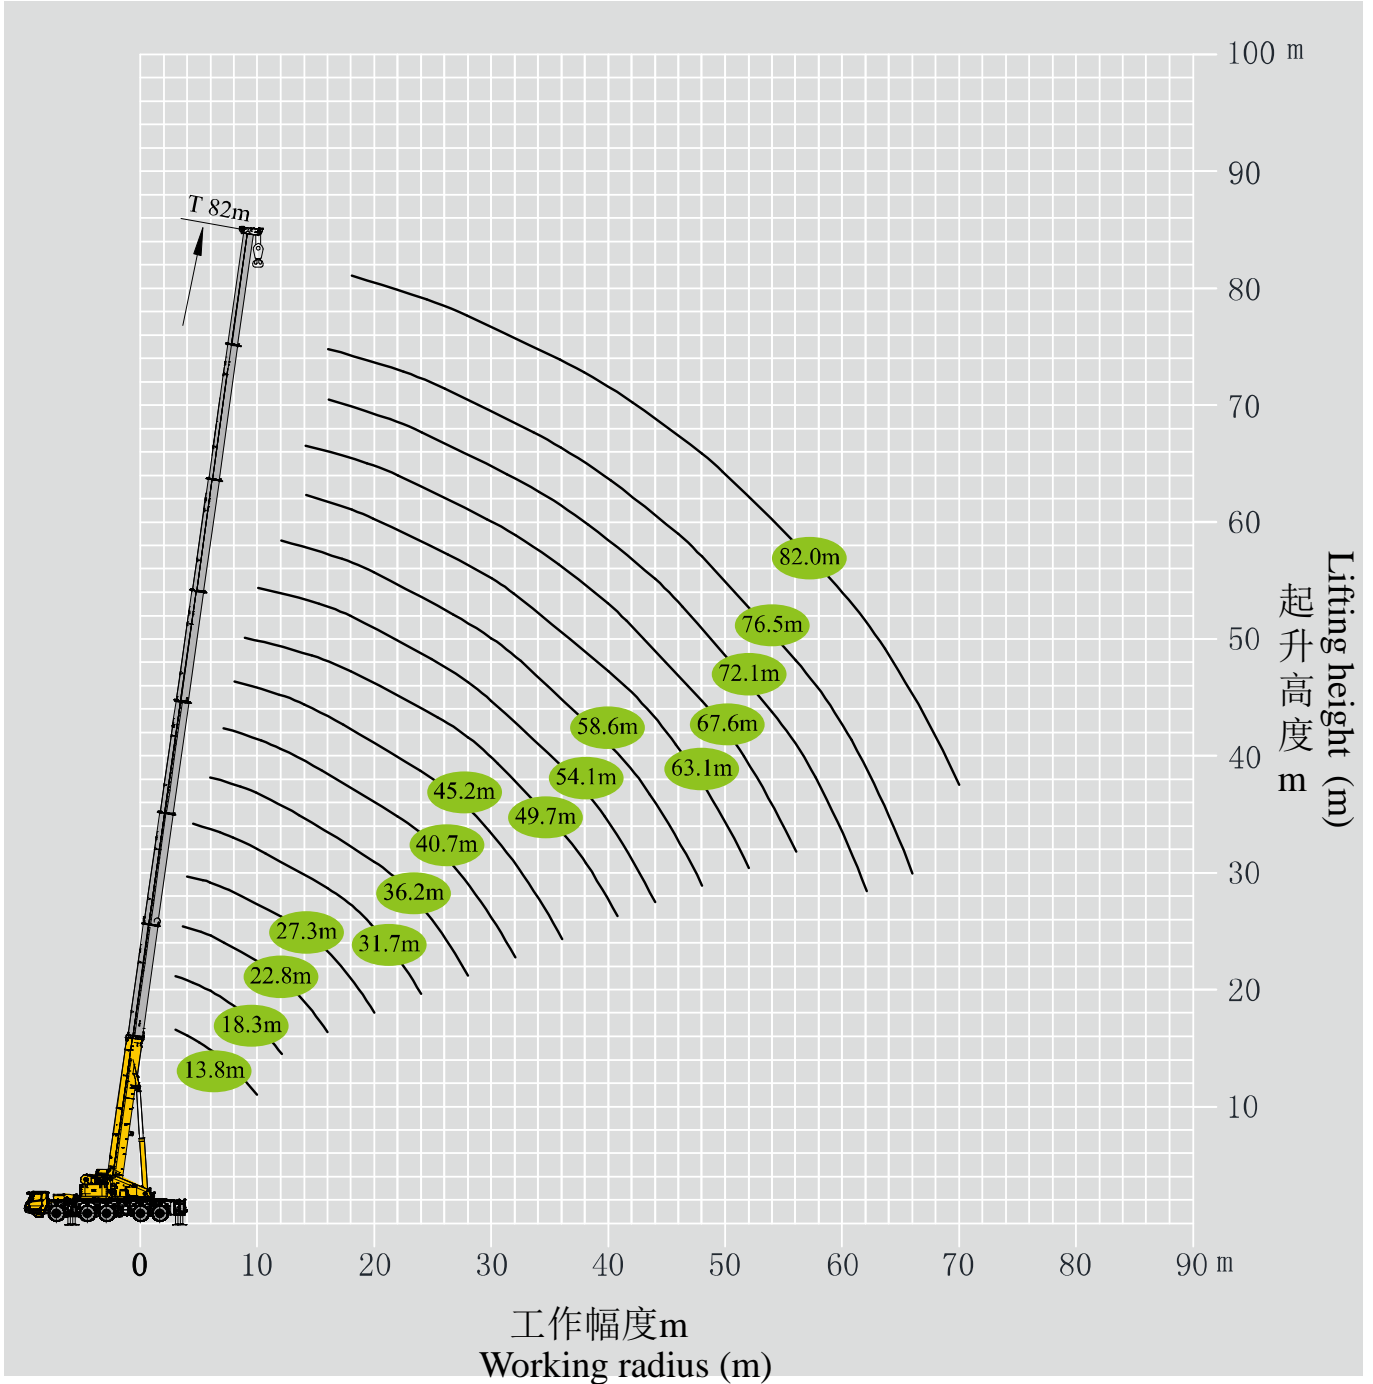

起重性能表

T 13.8~45.2m

Lifting capacities

13.8-45.2m



9.19m×8.3m



360°



90t



m	13.8	18.3	18.3	18.3	18.3	22.8	22.8	22.8	22.8	27.3	27.3	27.3	27.3	m
2.7	300*													3
3	150.0	65.5	141.6	142.6	140.6									3
3.5	145.0	61.9	141.6	142.6	137.9	67.7	140.1	113.0	128.8					3.5
4	145.0	58.9	141.6	141.1	137.9	65.5	138.9	106.0	125.9	43.2	68.4	109.4	127.7	4
4.5	143.7	56.2	139.8	139.8	137.9	62.8	130.3	99.0	124.5	42.8	65.7	108.6	127.7	4.5
5	138.7	54.2	137.3	134.9	136.2	60.0	115.5	92.0	123.2	42.6	63.8	107.8	121.1	5
6	121.6	49.0	100.0	118.8	120.0	55.7	106.1	85.0	115.0	38.2	58.8	105.0	110.7	6
7	108.3	45.9	99.0	106.4	106.6	51.4	105.5	78.8	97.2	30.5	55.0	98.0	95.4	7
8	102.0	42.4	96.9	96.0	96.0	48.0	95.0	72.5	87.3	30.0	51.9	93.1	86.4	8
9	88.2	39.6	86.5	85.5	84.6	43.9	86.5	66.3	79.2	28.9	48.9	82.8	79.2	9
10	78.4	37.6	77.8	76.0	75.1	42.8	76.3	60.0	71.1	27.0	46.7	75.4	75.1	10
12		33.1	63.0	61.8	60.8	38.6	64.3	52.2	57.6	21.1	37.5	63.7	62.7	12
14						34.7	53.2	44.5	47.7	20.6	36.5	53.2	52.5	14
16						28.5	45.6	36.7	40.5	18.6	35.6	45.6	44.6	16
18										16.7	32.1	39.1	35.1	18
20										13.9	25.0	34.0	30.6	20
组合C	0000000	0000001	0000100	0010000	0100000	0000011	0001100	0002000	1100000	0000021	0000111	0011100	1110000	组合C
倍率n	15	7	15	15	15	7	15	12	14	5	7	12	13	倍率n
吊钩 Hook	150t	75t	150t	150t	150t	75t	150t	150t	150t	75t	75t	150t	150t	吊钩 Hook

m	31.7	31.7	31.7	31.7	36.2	36.2	36.2	36.2	40.7	40.7	40.7	40.7	45.2	m
4.5	55.8	67.5	100.0	114.0										4.5
5	51.3	65.7	99.0	113.1										5
6	46.0	62.1	98.5	105.3	40.6	52.3	62.7	94.2						6
7	41.6	57.7	89.5	94.5	36.9	48.0	60.1	93.6	50.0	60.2	84.2	75.4		7
8	37.3	55.0	72.0	85.5	33.8	43.8	56.7	85.4	45.9	57.3	82.8	69.2	37.5	8
9	34.2	52.3	71.0	79.1	31.1	39.6	54.5	80.0	41.7	54.5	75.6	63.1	35.0	9
10	31.1	49.6	69.6	72.7	25.2	35.4	51.8	66.7	37.6	52.5	69.3	56.9	32.5	10
12	28.1	45.4	60.9	61.8	24.5	32.1	47.8	60.3	33.5	48.4	62.7	50.7	29.9	12
14	25.0	41.8	51.3	48.6	22.0	29.1	43.8	51.5	30.6	45.0	53.2	46.2	27.4	14
16	21.9	35.0	44.1	41.4	19.8	25.7	39.9	45.1	27.7	42.2	45.6	41.4	24.9	16
18	20.3	34.0	40.3	36.0	18.0	22.4	36.1	41.2	24.9	40.6	37.7	36.0	22.9	18
20	18.6	31.9	34.0	31.5	13.5	19.2	31.2	34.8	22.0	36.1	33.1	31.5	21.0	20
22	17.0	29.0	29.7	27.9	13.1	17.9	30.3	31.0	19.1	31.3	29.4	27.9	19.0	22
24	15.3	25.0	27.3	24.3	12.8	16.5	27.8	27.0	17.9	27.0	25.9	24.3	17.1	24
26					12.5	15.2	25.6	25.0	16.7	24.8	22.9	21.5	15.1	26
28					8.5	13.8	22.9	22.2	15.4	23.1	20.3	18.9	14.2	28
30									14.2	20.8	18.1	16.7	13.3	30
32									13.0	18.8	16.3	14.9	12.4	32
34													11.5	34
36													10.6	36
组合C	0000211	0001111	0011110	1111000	0000221	0002111	0011111	0111110	0021111	0111111	1111110	2111100	0022111	组合C
倍率n	6	7	11	11	4	5	7	9	5	6	8	8	4	倍率n
吊钩 Hook	75t	75t	150t	150t	75t	75t	75t	150t	75t	75t	150t	150t	75t	吊钩 Hook

注: *起重能力等级Capacity class

起重性能表

T 45.2~82.0m

Lifting capacities


m	45.2-82.0m T 9.19m×8.3m			360°			90t							m
	45.2	45.2	45.2	49.7	49.7	49.7	49.7	54.1	54.1	54.1	54.1	58.6	58.6	
8	58.0	58.2	68.9											8
9	54.1	55.7	63.4	34.7	46.4	58.0	51.5							9
10	50.1	54.1	58.6	31.1	44.2	55.9	47.0	28.8	35.0	43.6	48.4			10
12	43.5	51.4	52.8	27.8	39.1	49.5	42.5	25.4	33.4	40.3	44.6	27.3	22.7	12
14	38.4	47.8	45.9	24.8	34.8	43.8	38.0	22.5	29.5	36.9	39.5	26.4	22.1	14
16	30.5	42.1	39.5	21.9	30.7	39.1	33.5	20.0	26.1	32.7	35.5	24.5	21.4	16
18	29.5	39.9	36.1	19.8	26.5	34.1	30.8	18.1	23.5	29.5	32.7	22.6	20.8	18
20	27.9	36.6	33.1	17.9	24.8	31.7	28.1	16.4	21.4	24.5	26.9	20.7	20.2	20
22	25.0	31.0	29.8	16.4	23.0	28.8	25.4	14.9	19.5	24.0	26.4	16.4	16.0	22
24	23.1	26.8	26.0	15.0	21.1	27.9	22.7	13.7	17.9	22.1	24.7	16.0	15.8	24
26	19.5	25.0	23.0	13.7	19.5	25.4	21.7	12.7	16.4	20.5	22.6	15.8	15.2	26
28	19.0	22.3	20.4	12.7	17.0	21.2	19.9	11.7	15.3	18.0	20.5	14.8	14.8	28
30	18.3	20.0	18.1	11.8	16.7	20.2	18.3	10.7	14.3	17.5	19.4	12.8	13.7	30
32	17.0	18.0	16.2	10.8	15.5	18.1	16.3	10.1	13.4	16.5	17.1	12.6	13.0	32
34	16.0	16.3	14.5	10.3	14.0	16.3	14.6	9.4	12.4	15.3	15.7	12.5	12.3	34
36	13.3	14.8	13.0	9.6	12.4	14.7	13.1	8.8	11.4	14.3	13.9	11.8	11.5	36
38				9.0	10.7	13.3	11.8	8.3	10.8	13.1	12.6	10.2	10.8	38
40				8.3	9.3	12.0	10.6	7.8	9.9	11.9	11.4	10.0	10.1	40
42								7.3	9.4	10.8	10.3	9.8	9.6	42
44								6.8	8.9	9.9	9.3	9.5	9.1	44
46												9.0	8.6	46
48												8.2	8.0	48
组合C	02111111	11111111	21111110	00222211	02211111	21111111	22111110	00222221	02221111	12211111	22111111	11122221	11222211	组合C
倍率n	6	6	7	4	5	6	5	3	4	5	5	3	3	倍率n
吊钩 Hook	75t	75t	75t	75t	75t	75t	75t	35t	75t	75t	75t	35t	35t	吊钩 Hook

m	58.6, 63.1, 67.6, 72.1, 76.5, 82.0												m	
	58.6	58.6	63.1	63.1	63.1	63.1	67.6	67.6	67.6	72.1	72.1	76.5		82.0
12	33.9	38.0												12
14	31.7	34.7	23.8	23.6	26.2	28.9	17.1	18.9	22.9					14
16	28.4	30.9	21.8	21.6	25.1	27.3	16.4	17.9	21.7	15.9	19.1	15.7		16
18	25.5	27.5	19.3	19.8	23.0	24.9	15.8	16.9	20.6	15.3	19.0	15.0	11.4	18
20	23.2	24.0	17.7	18.5	21.0	22.3	15.1	15.9	19.4	14.5	18.2	14.7	11.2	20
22	20.5	22.9	16.2	17.2	18.0	18.3	14.4	14.9	17.5	13.5	17.3	14.2	11.0	22
24	19.4	21.7	14.7	15.9	17.5	18.0	13.9	14.2	17.0	12.5	16.1	13.6	10.7	24
26	17.9	20.3	13.7	14.5	16.0	17.5	12.9	13.6	16.5	11.7	15.1	13.0	10.5	26
28	16.6	19.4	12.7	13.2	14.9	16.9	11.9	12.9	15.5	11.0	14.5	12.4	10.3	28
30	15.4	17.4	11.7	11.9	13.4	15.7	11.0	12.2	14.5	10.6	13.5	11.8	10.1	30
32	14.1	16.8	11.0	11.4	12.7	14.7	10.1	11.0	13.0	10.0	12.4	11.3	9.7	32
34	13.1	15.1	10.0	10.9	11.7	13.7	9.5	10.9	12.6	9.6	11.9	10.7	9.2	34
36	12.3	13.9	9.5	10.4	11.2	13.0	9.0	10.1	11.9	9.1	11.1	10.3	8.8	36
38	11.2	12.8	9.0	9.9	10.2	12.0	8.5	9.4	11.3	8.8	10.4	9.8	8.0	38
40	10.8	11.6	8.5	9.4	9.7	11.5	8.0	8.9	10.5	8.4	9.8	9.3	7.9	40
42	10.3	10.5	8.0	9.0	9.2	10.0	7.5	8.4	9.8	7.9	9.3	8.8	7.8	42
44	9.8	9.5	7.4	8.5	8.7	9.3	6.9	7.9	9.1	7.5	8.7	8.4	7.6	44
46	9.2	8.6	6.9	8.1	8.2	8.7	6.7	7.4	8.5	7.1	8.3	8.0	7.0	46
48	8.4	7.8	6.5	7.7	7.7	7.9	6.2	6.9	8.0	6.8	7.5	7.6	6.4	48
50			6.3	7.3	7.1	7.2	5.9	6.6	7.1	6.3	7.0	7.1	6.3	50
52			5.8	6.8	6.8	6.5	5.6	6.6	6.3	6.2	6.5	6.9	6.0	52
54							5.4	6.2	5.4	6.0	6.0	6.4	5.6	54
56							5.1	5.6	5.2	5.7	5.7	5.9	5.3	56
58										5.4	5.1	5.3	4.8	58
60										5.1	4.8	4.9	4.6	60
62										5.0	4.5	4.7	4.3	62
64												4.5	4.0	64
66												4.1	3.7	66
68													3.4	68
70													3.1	70
组合C	12221111	22211111	02222221	11222221	12222211	22221111	02222222	12222221	22222211	12222222	22222221	22222222	33333333	组合C
倍率n	4	4	3	3	3	3	2	2	3	2	2	2	2	倍率n
吊钩 Hook	75t	75t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	吊钩 Hook

起重性能表

T 13.8~45.2m

Lifting capacities




m	T													m
	13.8	18.3	18.3	18.3	18.3	22.8	22.8	22.8	22.8	27.3	27.3	27.3	27.3	
3	136.9	61.6	131.8	132.7	130.8									3
3.5	136.3	58.2	131.8	132.7	129.6	63.6	130.3	106.2	121.1					3.5
4	136.3	55.4	131.8	132.7	129.6	61.0	130.3	99.6	116.5	40.6	64.3	102.8	115.0	4
4.5	121.2	52.8	122.2	120.1	119.2	58.4	115.6	92.7	106.2	40.2	61.7	95.2	110.6	4.5
5	106.1	50.9	108.4	105.5	107.1	56.1	94.2	82.7	99.2	40.0	59.9	89.4	100.0	5
6	85.7	46.0	73.1	86.6	87.3	52.0	80.3	69.6	84.8	35.9	55.3	81.1	84.2	6
7	69.9	43.2	67.8	70.7	70.0	48.2	73.8	59.9	64.1	28.7	51.7	70.4	64.9	7
8	52.2	39.8	54.7	52.9	52.2	45.2	55.6	45.7	47.5	28.2	48.8	55.5	48.8	8
9	40.8	37.2	43.2	41.5	40.4	41.3	44.0	36.2	37.0	27.1	45.5	43.0	38.1	9
10	33.0	35.2	35.2	33.6	32.5	37.2	35.2	29.2	29.9	25.4	38.0	35.2	31.9	10
12		24.0	24.2	22.7	21.6	26.4	24.4	20.3	19.6	19.8	24.1	24.9	21.1	12
14						20.1	17.8	14.7	13.2	19.4	18.9	18.1	14.6	14
16						14.4	13.4	10.8	9.2	16.2	15.8	13.7	10.4	16
18										12.8	12.7	10.3	6.9	18
20										9.5	8.7	7.9	4.8	20
组合C	0000000	0000001	0000100	0010000	0100000	0000011	0001100	0002000	1100000	0000021	0000111	0011100	1110000	组合C
倍率n	15	7	15	15	15	7	15	12	14	5	7	12	13	倍率n
吊钩 Hook	150t	75t	150t	150t	150t	75t	150t	150t	150t	75t	75t	150t	150t	吊钩 Hook

m	T													m
	31.7	31.7	31.7	31.7	36.2	36.2	36.2	36.2	40.7	40.7	40.7	40.7	45.2	
4.5	52.5	63.4	94.0	97.4										4.5
5	48.2	61.8	91.5	94.4										5
6	43.2	58.4	83.3	81.6	38.2	49.2	58.9	76.1						6
7	39.1	54.2	70.0	66.8	34.7	45.1	56.5	69.5	47.0	56.6	62.7	59.6		7
8	35.1	51.7	46.5	49.9	31.8	41.2	53.3	53.7	43.1	53.9	51.9	45.0	35.3	8
9	32.1	46.6	39.4	39.5	29.2	37.2	46.0	43.5	38.4	43.5	41.0	35.0	32.9	9
10	29.2	37.8	34.1	32.3	23.7	32.5	37.6	32.3	30.8	36.0	33.4	27.7	30.6	10
12	25.1	27.3	24.6	22.0	23.0	24.2	27.1	24.0	22.2	25.6	24.3	18.9	23.0	12
14	19.2	20.5	18.3	14.7	20.7	18.8	20.0	18.0	17.1	19.0	17.6	14.2	17.6	14
16	14.8	14.3	14.0	10.6	16.4	14.6	15.0	14.0	13.5	14.6	13.2	10.8	13.9	16
18	12.1	12.0	10.9	7.7	13.2	11.1	11.7	10.8	10.8	11.8	9.7	7.9	11.3	18
20	9.9	9.9	8.8	5.5	9.0	8.4	8.8	8.4	8.4	9.5	7.4	5.7	9.1	20
22	8.2	8.0	6.9	3.9	7.8	7.1	7.7	6.6	6.4	7.4	5.6	4.0	7.3	22
24	6.6	6.1	5.5	2.5	6.8	5.9	6.3	5.1	5.3	5.8	4.1	2.7	5.7	24
26					6.0	4.8	5.3	4.0	4.4	4.7	3.0	1.6	4.3	26
28					3.7	3.9	4.3	3.0	3.5	3.9	2.1		3.6	28
30									2.8	3.0	1.3		2.9	30
32									2.1	2.3			2.3	32
34													1.7	34
36													1.2	36
组合C	0000211	0001111	0011110	1111000	0000221	0002111	0011111	0111110	0021111	0111111	1111110	2111100	0022111	组合C
倍率n	6	7	11	11	4	5	7	9	5	6	8	8	4	倍率n
吊钩 Hook	75t	75t	150t	150t	75t	75t	75t	150t	75t	75t	150t	150t	75t	吊钩 Hook

起重性能表

T 45.2~82.0m

Lifting capacities




m	45.2~82.0m T														m
	45.2	45.2	45.2	49.7	49.7	49.7	49.7	54.1	54.1	54.1	54.1	58.6	58.6		
8	54.0	53.7	49.8												8
9	41.8	42.5	38.5	32.6	42.5	44.0	36.6								9
10	33.5	34.9	31.0	29.2	35.2	35.7	28.9	27.1	32.8	33.1	33.1				10
12	23.6	25.2	22.0	26.1	24.7	23.6	20.5	23.9	24.7	24.0	24.4	24.8	18.2		12
14	17.5	18.5	15.5	19.5	18.1	16.8	14.9	20.7	18.0	18.1	17.3	18.8	14.0		14
16	11.8	13.2	11.0	14.9	13.5	12.6	10.8	16.0	13.8	13.4	13.1	14.4	11.5		16
18	10.0	11.0	8.6	11.7	10.0	9.4	8.2	12.9	10.6	10.4	10.2	11.3	9.6		18
20	8.2	8.9	6.7	9.4	8.1	7.3	6.2	10.3	8.3	7.3	7.0	8.9	7.9		20
22	6.5	6.6	5.2	7.7	6.5	5.7	4.4	8.3	6.5	6.0	5.6	6.2	5.4		22
24	5.1	5.1	3.6	6.2	5.0	4.6	3.0	6.8	5.1	4.6	4.2	5.2	4.7		24
26	3.7	4.0	2.4	5.0	3.9	3.5	2.1	5.6	4.0	3.4	3.0	4.4	3.7		26
28	3.0	3.0	1.5	4.1	2.8	2.3	1.3	4.6	3.1	2.3	2.0	3.5	3.0		28
30	2.3	2.2		3.3	2.2	1.6		3.7	2.3	1.6	1.2	2.5	2.2		30
32	1.7	1.5		2.5	1.5			3.0	1.6	1.0		2.0	1.6		32
34	1.1			2.0				2.4	1.0			1.5	1.0		34
36				1.5				1.9				1.0			36
38								1.4							38
组合C	02111111	11111111	21111110	00222211	02211111	21111111	22111110	00222221	02221111	12211111	22111111	11122221	11222211	组合C	
倍率n	6	6	7	4	5	6	5	3	4	5	5	3	3	倍率n	
吊钩 Hook	75t	75t	75t	75t	75t	75t	75t	35t	75t	75t	75t	35t	35t	吊钩 Hook	

m	45.2~82.0m T														m
	58.6	58.6	63.1	63.1	63.1	63.1	67.6	67.6	67.6	72.1	72.1	76.5	82.0		
12	25.0	23.7													12
14	18.1	17.6	19.8	18.3	18.4	18.1	16.1	16.8	18.2						14
16	13.9	13.1	15.4	13.5	14.2	13.4	14.0	12.3	13.0	14.2	14.6	14.4			16
18	10.5	9.8	11.8	10.7	11.0	10.2	11.3	9.4	9.7	10.7	11.3	11.5	10.7		18
20	8.0	7.1	9.6	8.9	8.5	7.6	9.4	7.7	7.7	8.2	8.5	8.8	8.6		20
22	6.1	5.6	7.7	7.2	6.3	5.2	7.9	6.2	5.9	6.5	6.8	6.7	6.7		22
24	4.8	4.3	6.0	5.6	5.2	4.3	6.7	5.1	4.8	5.2	5.3	5.2	5.2		24
26	3.6	3.2	4.9	4.4	3.9	3.2	5.5	4.0	3.6	4.2	4.1	4.2	3.9		26
28	2.7	2.2	3.9	3.3	3.0	2.4	4.4	3.2	2.6	3.4	3.1	3.3	3.1		28
30	1.8	1.3	3.0	2.5	2.1	1.5	3.5	2.4	1.7	2.7	2.2	2.6	2.4		30
32	1.1		2.3	1.9	1.4		2.7	1.7	1.0	2.1	1.5	1.9	1.8		32
34			1.6	1.4			2.1	1.2		1.5		1.2	1.2		34
36			1.2				1.6								36
38							1.1								38
组合C	12221111	22211111	02222221	11222221	12222211	22221111	02222222	12222221	22222211	12222222	22222221	22222222	33333333	组合C	
倍率n	4	4	3	3	3	3	2	2	3	2	2	2	2	倍率n	
吊钩 Hook	75t	75t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	吊钩 Hook	

起重性能表

T 13.8~45.2m

Lifting capacities




m	T													m
	13.8	18.3	18.3	18.3	18.3	22.8	22.8	22.8	22.8	27.3	27.3	27.3	27.3	
3	135.5	60.9	130.4	131.3	129.5									3
3.5	134.8	57.5	130.4	131.3	128.2	62.9	128.9	105.1	119.8					3.5
4	130.1	54.8	129.9	129.0	126.9	60.4	128.9	98.2	113.6	40.2	63.6	100.6	112.1	4
4.5	113.5	52.3	114.6	112.6	111.7	57.8	107.6	86.9	99.4	39.8	61.1	90.6	104.4	4.5
5	98.7	50.4	100.9	99.0	99.7	55.5	88.6	77.0	92.3	39.6	59.3	84.0	93.9	5
6	80.1	45.5	68.6	80.4	80.8	51.5	74.6	65.3	77.3	35.5	54.7	75.4	76.9	6
7	54.4	42.7	53.3	55.2	54.3	47.7	58.2	47.1	49.4	28.4	51.1	55.5	50.2	7
8	40.1	39.4	42.7	40.8	40.0	44.6	43.5	35.6	35.9	27.9	45.5	43.4	37.2	8
9	29.9	32.2	32.5	30.6	29.3	33.8	33.4	27.3	26.4	26.8	35.6	32.6	27.4	9
10	23.0	25.9	25.5	23.7	22.5	28.0	25.7	21.1	20.3	25.1	28.8	25.7	21.9	10
12		17.0	16.8	15.2	14.2	19.1	17.1	14.1	12.5	18.1	17.6	17.4	13.7	12
14						14.1	12.0	9.8	7.7	14.6	13.5	12.2	8.7	14
16						9.8	8.6	6.8	4.6	11.4	11.0	8.8	5.5	16
18										8.7	8.6	6.2	3.0	18
20										6.2	5.6	4.3	1.3	20
组合C	0000000	0000001	0000100	0010000	0100000	0000011	0001100	0002000	1100000	0000021	0000111	0011100	1110000	组合C
倍率n	15	7	15	15	15	7	15	12	14	5	7	12	13	倍率n
吊钩 Hook	150t	75t	150t	150t	150t	75t	150t	150t	150t	75t	75t	150t	150t	吊钩 Hook

m	T													m
	31.7	31.7	31.7	31.7	36.2	36.2	36.2	36.2	40.7	40.7	40.7	40.7	45.2	
4.5	51.9	62.7	90.8	92.5										4.5
5	47.7	61.1	84.5	87.8										5
6	42.8	57.7	76.7	75.7	37.8	48.6	58.3	69.9						6
7	38.7	53.6	55.8	51.9	34.3	44.6	55.9	55.8	46.5	56.0	50.3	46.7		7
8	34.7	46.3	36.6	38.3	31.5	40.7	45.4	42.1	38.2	43.3	40.4	34.6	34.9	8
9	31.8	36.4	30.3	28.9	28.9	31.9	35.8	33.2	29.8	33.6	30.8	25.6	29.4	9
10	26.2	28.6	25.3	22.6	23.4	24.6	28.3	23.8	23.1	26.9	24.2	19.4	23.5	10
12	18.4	19.9	17.6	14.6	20.1	17.7	19.7	17.0	16.1	18.4	16.8	12.6	16.6	12
14	13.8	14.6	12.6	9.1	15.1	13.4	14.1	12.3	12.1	13.3	11.7	8.9	12.4	14
16	10.4	9.9	9.3	6.0	11.7	10.1	10.3	9.1	9.2	9.8	8.2	6.2	9.5	16
18	8.2	8.1	6.9	3.7	9.2	7.5	7.7	6.7	7.1	7.6	5.6	3.9	7.5	18
20	6.5	6.4	5.3	2.1	6.1	5.5	5.6	4.8	5.3	5.8	3.9	2.3	5.7	20
22	5.2	4.9	3.8		5.1	4.4	4.7	3.4	3.8	4.2	2.5		4.3	22
24	4.0	3.6	2.7		4.3	3.4	3.6	2.3	2.9	3.0	1.4		3.2	24
26					3.6	2.6	2.7	1.4	2.2	2.2			2.2	26
28					2.1	1.9	2.0		1.5	1.4			1.5	28
30													1.0	30
组合C	0000211	0001111	0011110	1111000	0000221	0002111	0011111	0111110	0021111	0111111	1111110	2111100	0022111	组合C
倍率n	6	7	11	11	4	5	7	9	5	6	8	8	4	倍率n
吊钩 Hook	75t	75t	150t	150t	75t	75t	75t	150t	75t	75t	150t	150t	75t	吊钩 Hook

起重性能表


T 45.2~82.0m

Lifting capacities



Height (m)	45.2	45.2	45.2	49.7	49.7	49.7	49.7	54.1	54.1	54.1	54.1	58.6	58.6	Height (m)
8	42.5	42.1	38.6											8
9	32.1	32.4	28.6	32.3	32.5	33.2	27.1							9
10	24.8	25.7	22.1	27.1	26.0	25.9	20.6	26.8	24.2	24.2	23.9			10
12	16.8	17.8	15.0	19.0	17.5	16.5	13.9	20.4	17.6	16.8	16.9	17.8	12.9	12
14	12.1	12.6	10.0	13.8	12.5	11.2	9.5	14.8	12.4	12.2	11.4	13.2	9.7	14
16	7.8	8.6	6.7	10.3	8.9	8.0	6.4	11.2	9.1	8.6	8.2	9.7	7.6	16
18	6.3	6.8	4.7	7.8	6.2	5.5	4.4	8.7	6.7	6.2	5.9	7.3	6.0	18
20	4.8	5.1	3.2	6.0	4.8	3.9	2.8	6.7	4.9	4.0	3.6	5.5	4.7	20
22	3.5	3.4	1.9	4.6	3.5	2.6	1.5	5.2	3.5	2.9	2.4	3.6	3.0	22
24	2.5	2.3		3.5	2.4	1.7		4.0	2.5	1.8	1.4	2.8	2.3	24
26	1.5	1.4		2.6	1.5			3.1	1.6			2.0	1.5	26
28				1.9				2.3				1.4		28
30				1.3				1.6						30
32								1.1						32
组合C	02111111	11111111	21111110	00222211	02211111	21111111	22111110	00222221	02221111	12211111	22111111	11122221	11222111	组合C
倍率n	6	6	7	4	5	6	5	3	4	5	5	3	3	倍率n
吊钩 Hook	75t	75t	75t	75t	75t	75t	75t	35t	75t	75t	75t	35t	35t	吊钩 Hook

Height (m)	58.6	58.6	63.1	63.1	63.1	63.1	67.6	67.6	67.6	72.1	72.1	76.5	82.0	Height (m)
12	17.6	16.4												12
14	12.2	11.6	13.9	12.8	12.5	12.1	13.0	11.6	12.3					14
16	9.0	8.2	10.5	9.1	9.3	8.5	9.6	8.2	8.3	9.6	9.5	10.0		16
18	6.4	5.7	7.7	6.9	6.8	6.0	7.5	6.0	5.8	7.0	6.9	7.3	7.0	18
20	4.5	3.7	6.0	5.4	4.9	4.0	6.0	4.6	4.2	5.0	4.9	5.2	5.2	20
22	3.1	2.4	4.5	4.1	3.3	2.4	4.8	3.4	2.9	3.8	3.5	3.7	3.7	22
24	2.0	1.4	3.2	2.9	2.4	1.5	3.8	2.5	1.9	2.8	2.4	2.6	2.5	24
26	1.1		2.3	2.0	1.4		2.9	1.7		2.0	1.4	1.7	1.6	26
28			1.6	1.2			2.0			1.3		1.0		28
30							1.4							30
组合C	12221111	22211111	02222221	11222221	12222111	22221111	02222222	12222221	22222111	12222222	22222221	22222222	33333333	组合C
倍率n	4	4	3	3	3	3	2	2	3	2	2	2	2	倍率n
吊钩 Hook	75t	75t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	35t	吊钩 Hook

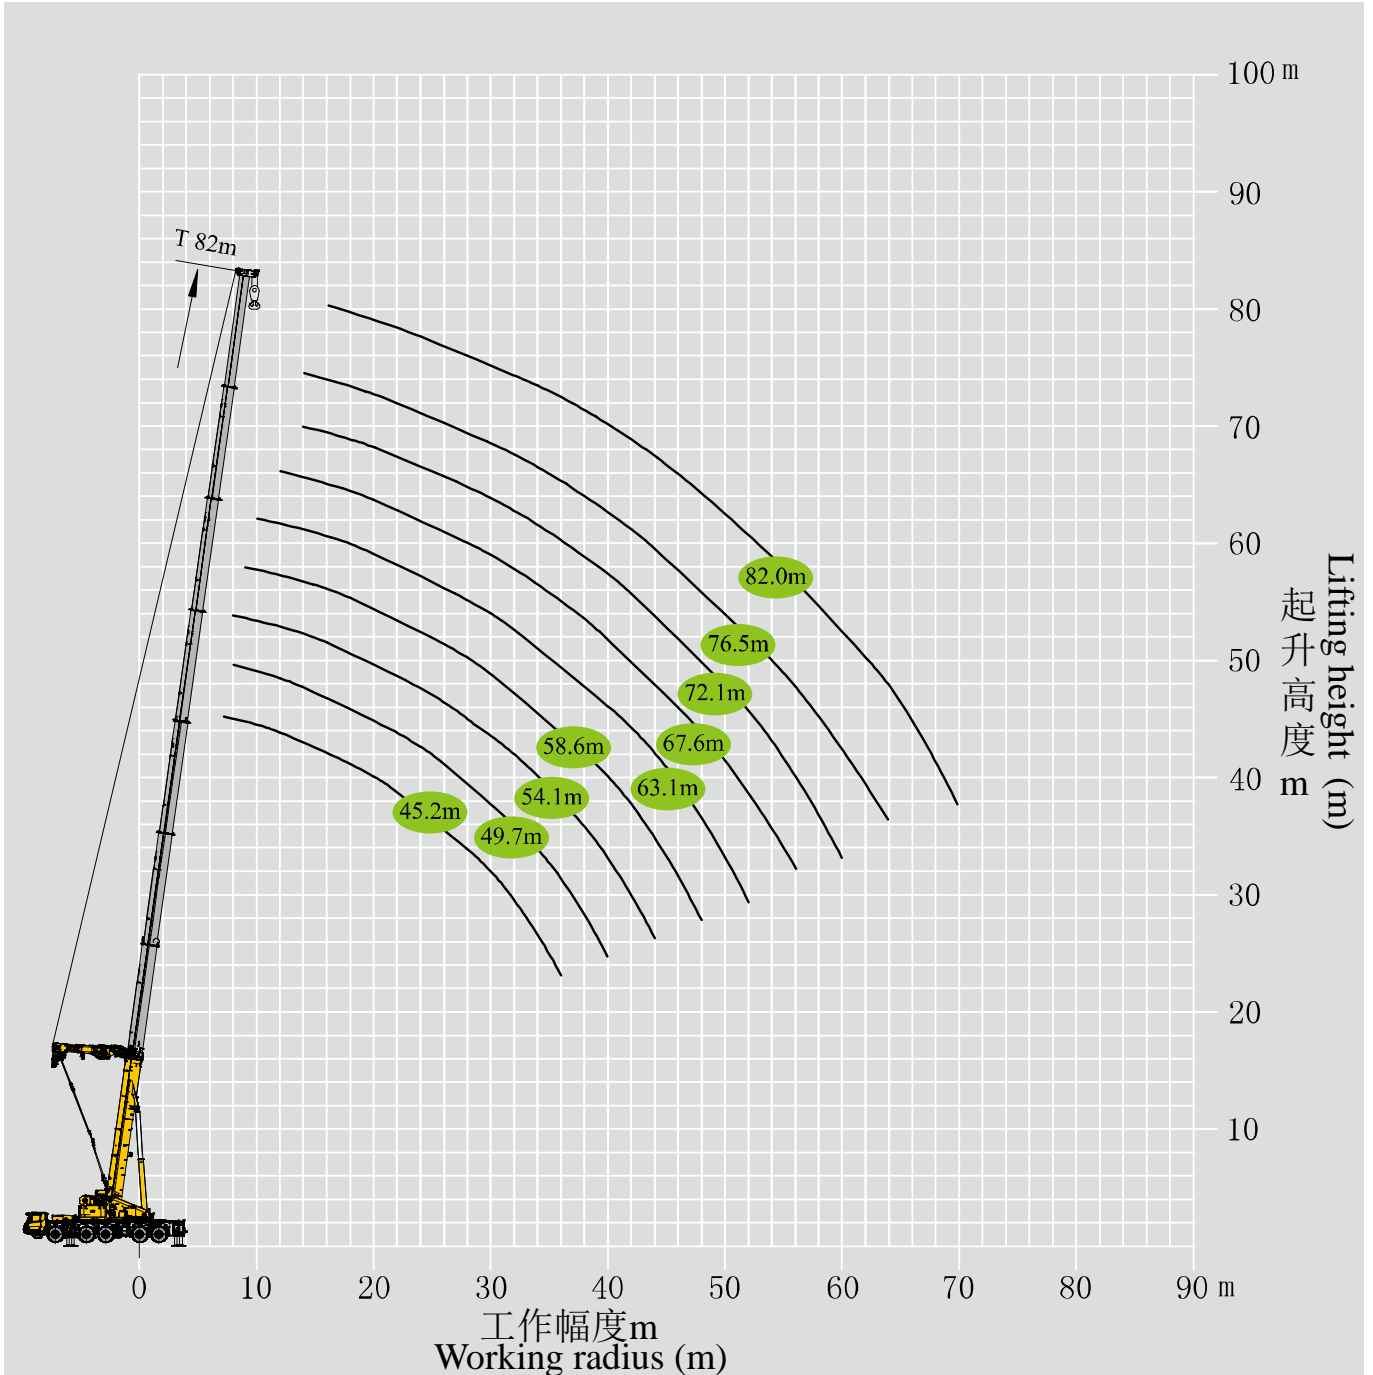

起重性能表

Lifting capacities

T 45.2~58.6m


m	45.2-82.0m T				9.19m×8.3m		360°		90t						m
	45.2	45.2	45.2	45.2	49.7	49.7	49.7	49.7	54.1	54.1	54.1	54.1	58.6		
7	59.1	66.3	70.3	72.1										7	
8	55.6	62.9	66.9	67.9	51.7	59.7	63.7	62.8	46.8	53.2	55.6	57.9		8	
9	53.0	61.5	64.2	67.2	48.7	54.9	63.1	58.4	44.1	49.7	53.1	57.4	43.7	9	
10	50.0	57.0	61.4	63.9	45.6	51.4	61.3	54.6	41.4	46.5	50.0	55.9	41.5	10	
12	44.2	56.5	56.7	60.0	40.5	46.3	55.1	48.7	36.2	41.4	44.7	50.9	37.5	12	
14	39.8	50.6	53.9	46.6	35.7	41.2	51.5	43.6	30.8	36.9	40.4	47.3	31.3	14	
16	34.8	45.1	47.0	40.0	30.8	37.2	46.0	38.6	28.2	31.5	35.6	43.6	28.8	16	
18	30.6	41.2	40.7	34.0	28.2	33.4	39.0	34.0	25.7	28.8	30.8	39.0	26.6	18	
20	28.2	36.6	32.0	29.4	25.8	28.9	33.8	29.5	24.1	26.4	28.3	34.2	24.7	20	
22	26.0	31.7	31.4	26.0	24.0	26.8	30.2	26.1	22.3	24.8	25.8	29.7	22.8	22	
24	24.1	28.7	27.4	22.4	22.4	24.2	26.4	22.4	20.7	23.1	24.2	27.1	21.6	24	
26	22.3	25.5	24.5	19.9	20.5	21.7	24.0	19.9	19.3	21.2	21.6	24.3	19.8	26	
28	21.8	22.3	21.6	17.9	20.2	19.8	21.8	17.9	17.9	19.5	19.8	21.3	19.0	28	
30	20.0	18.8	19.0	15.6	19.6	17.3	18.5	15.8	16.7	17.7	19.1	18.5	18.2	30	
32	18.6	16.8	16.8	13.7	18.6	15.4	16.6	13.9	16.4	15.8	17.1	16.4	17.5	32	
34	16.0	15.0	14.9	12.0	16.6	13.9	14.6	12.1	15.5	14.3	15.2	14.5	16.2	34	
36	14.2	13.3	13.3	10.5	15.0	12.3	13.0	10.5	14.8	12.6	13.5	12.8	14.7	36	
38					13.6	11.0	11.5	9.4	13.4	11.4	11.9	11.3	13.5	38	
40					12.2	9.9	10.1	8.2	12.1	10.2	10.7	10.2	12.1	40	
42									11.1	9.2	9.5	9.0	11.0	42	
44									10.1	8.3	8.5	7.8	9.9	44	
46													8.8	46	
48													8.1	48	
组合C	0022111	0211111	1111111	2111110	0022211	0221111	2111111	2211110	0022221	0222111	1221111	2211111	1112221	组合C	
倍率n	6	7	7	7	5	6	6	6	5	6	6	6	5	倍率n	
吊钩 Hook	75t	75t	75t	75t	75t	75t	75t	75t	75t	75t	75t	75t	75t	吊钩 Hook	

起重性能表

Lifting capacities

T 58.6~82.0m

m	58.6-82.0m T			9.19m×8.3m	360°	90t	m													
	58.6	58.6	58.6				63.1	63.1	63.1	63.1	67.6	67.6	67.6	72.1	72.1	76.5	82			
9	45.3	47.4	49.6														9			
10	42.6	44.8	47.0	34.4	37.7	40.0	42.3										10			
12	38.8	40.0	44.4	31.6	33.6	36.6	40.9	28.6	30.1	33.4							12			
14	34.6	36.4	40.0	29.1	29.2	31.2	36.5	26.3	27.4	31.8	25.0	28.1	23.1				14			
16	29.5	31.2	38.0	26.5	27.0	27.8	34.3	24.5	25.4	30.4	23.3	26.0	22.7	17.7			16			
18	27.0	28.5	35.0	24.4	24.8	26.1	31.8	22.5	23.9	28.9	21.8	25.0	22.3	17.2			18			
20	25.2	25.7	32.0	22.6	23.0	23.9	29.6	20.9	22.0	27.2	20.1	24.1	20.6	16.7			20			
22	23.7	24.0	29.5	21.2	21.3	22.1	27.6	19.6	20.6	25.3	18.9	23.1	20.0	16.3			22			
24	21.9	22.3	25.9	19.5	20.0	20.7	25.5	18.3	19.2	23.5	17.5	21.2	18.6	16.0			24			
26	20.0	20.4	22.9	18.5	19.0	19.3	23.5	16.9	17.7	22.2	16.6	19.8	17.8	15.2			26			
28	19.3	19.6	21.4	18.2	17.7	18.0	21.1	15.8	16.7	20.4	15.5	19.0	16.8	14.2			28			
30	17.9	17.3	19.4	17.2	16.5	17.1	18.6	14.9	16.6	18.5	14.6	18.0	16.2	13.3			30			
32	16.0	15.4	16.8	16.3	15.4	15.7	16.6	14.1	15.5	16.5	13.9	16.5	15.5	12.5			32			
34	14.3	13.8	14.7	15.3	14.5	14.2	14.6	13.5	14.5	15.2	13.9	15.1	14.8	11.8			34			
36	12.9	12.3	13.2	14.5	13.4	12.9	13.0	12.7	13.9	13.5	13.1	13.6	13.6	11.4			36			
38	11.5	11.0	11.6	13.7	12.9	11.4	11.4	12.1	13.0	12.0	12.3	12.7	12.5	10.6			38			
40	10.4	9.9	10.3	12.4	11.5	10.3	10.1	11.5	12.3	11.2	11.8	11.5	11.6	10.0			40			
42	9.4	8.9	9.2	11.3	10.4	9.3	9.1	11.3	10.8	10.0	11.3	10.5	10.6	9.5			42			
44	8.5	7.9	8.2	10.2	9.4	8.3	8.1	10.7	9.9	8.9	10.6	9.3	10.1	9.0			44			
46	7.5	7.0	7.2	9.3	8.6	7.4	7.1	9.8	8.9	8.0	9.4	8.5	9.0	8.6			46			
48	6.8	6.3	6.3	8.4	7.8	6.7	6.3	9.0	8.0	7.1	8.5	7.6	8.1	8.2			48			
50				7.5	6.9	6.0	5.6	8.2	7.1	6.3	7.7	6.7	7.3	7.5			50			
52				6.8	6.2	5.3	4.9	7.4	6.4	5.5	6.9	6.0	6.5	6.7			52			
54								6.7	5.8	4.9	6.3	5.4	5.9	6.0			54			
56								6.1	5.0	4.2	5.7	4.7	5.3	5.4			56			
58											5.1	4.1	4.7	4.9			58			
60											4.5	3.6	4.1	4.3			60			
62													3.6	3.8			62			
64													3.2	3.3			64			
66														2.9			66			
68														2.4			68			
70														2.1			70			
组合C	1122211	1222111	2221111	0222221	1122221	1222211	2222111	0222222	1222221	2222211	1222222	2222221	2222222	3333333	组合C					
倍率n	5	5	5	4	4	4	4	3	3	4	3	3	3	2			倍率n			
吊钩 Hook	75t	75t	75t	75t	75t	75t	75t	35t	35t	75t	35t	35t	35t	35t			吊钩 Hook			

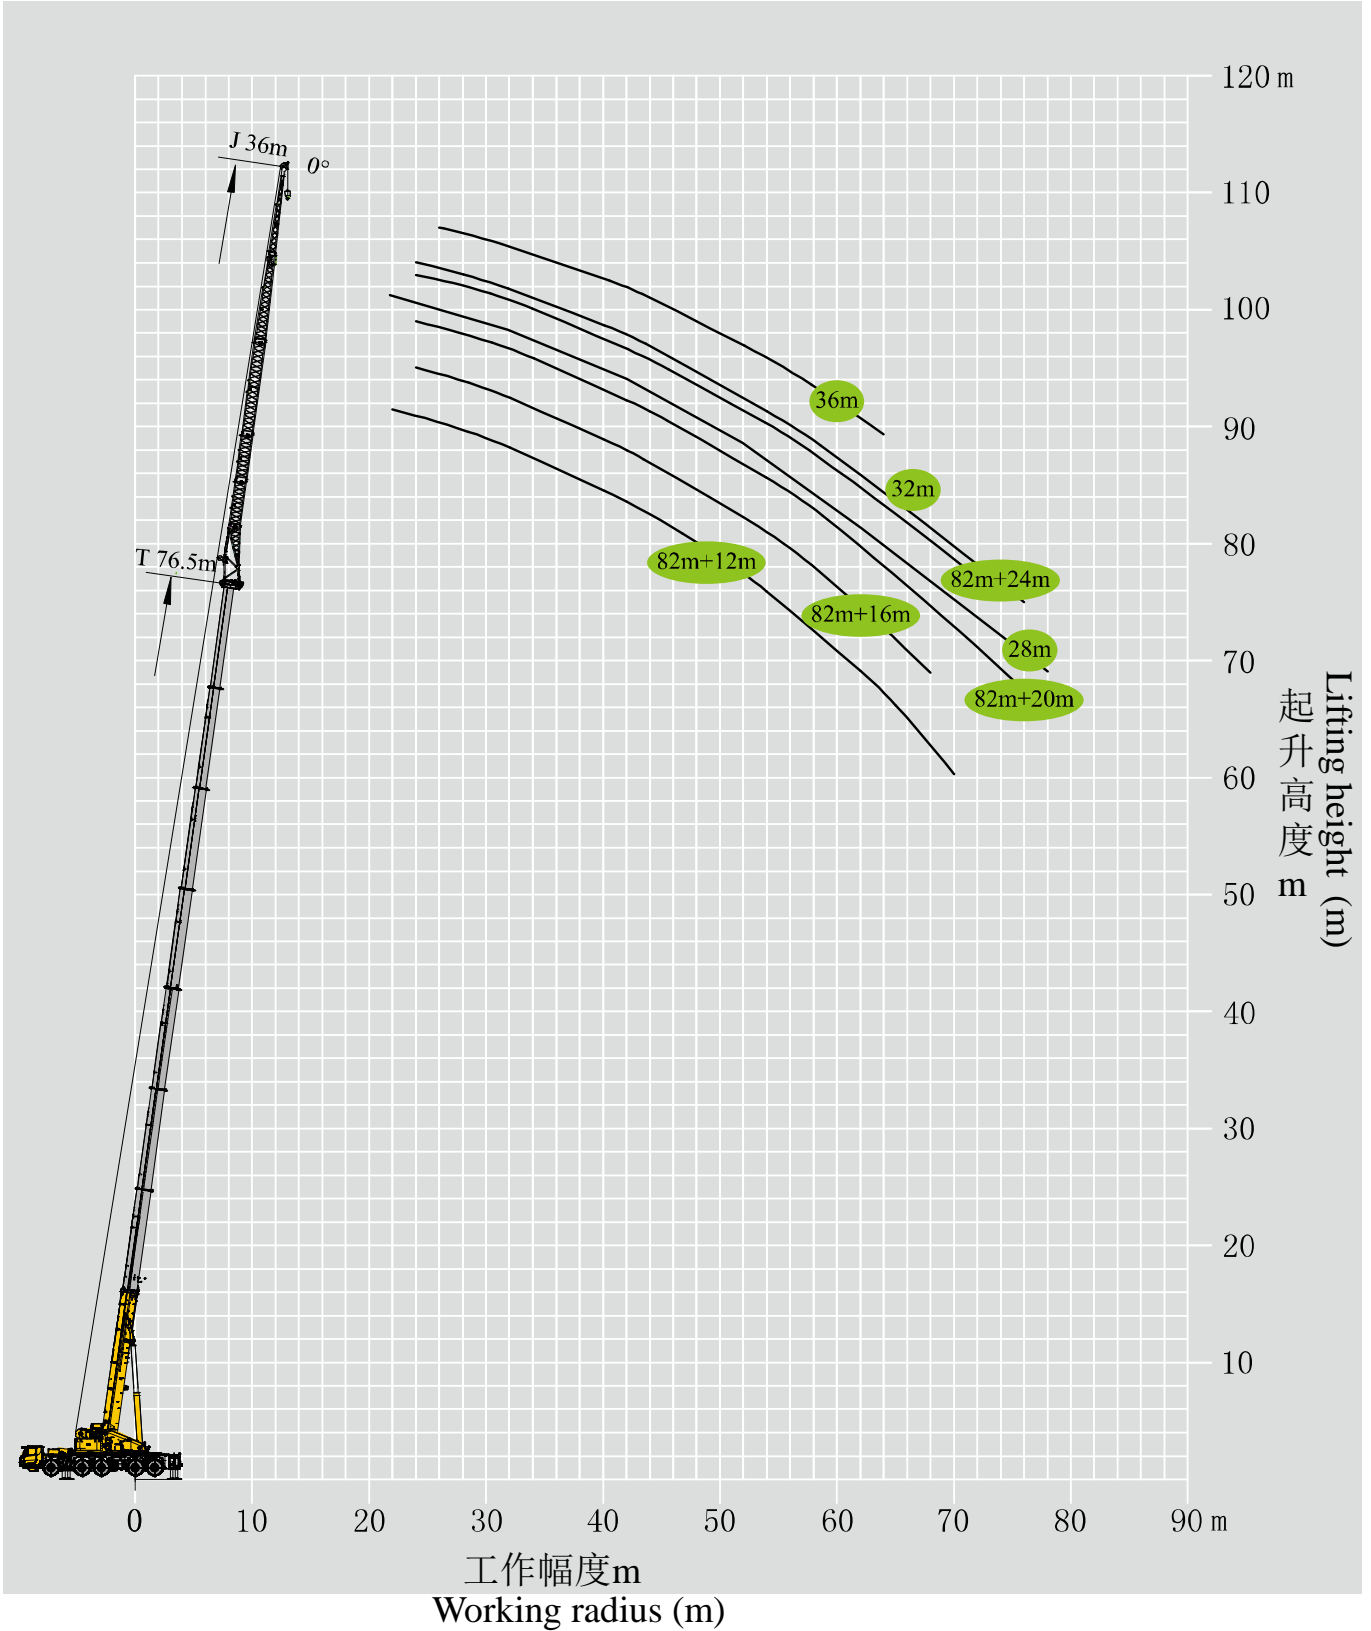

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82m T	12m J	9.19m×8.3m	360°	90t	m
	63.1	67.6	72.1	76.5	82	
	12	12	12	12	12	
14	15.8					14
16	15.5	14.0				16
18	15.2	13.7	11.4			18
20	14.9	13.4	11.4	8.6		20
22	14.5	13.1	11.1	8.6	6.5	22
24	13.8	12.7	10.8	8.4	6.5	24
26	13.4	12.4	10.5	8.2	6.5	26
28	12.6	12.1	10.0	8.0	6.5	28
30	12.0	11.2	9.4	7.7	6.5	30
32	11.0	10.2	9.0	7.5	6.4	32
34	10.5	9.5	8.7	7.2	6.3	34
36	9.7	8.9	8.0	7.0	6.2	36
38	9.2	8.1	7.5	6.8	6.0	38
40	8.7	7.6	6.9	6.5	5.8	40
42	7.6	7.0	6.4	6.1	5.5	42
44	7.1	6.5	5.9	5.7	5.1	44
46	6.6	6.0	5.6	5.3	4.7	46
48	6.3	5.7	5.1	4.9	4.3	48
50	5.7	5.1	4.9	4.5	4.1	50
52	5.5	4.8	4.5	4.3	3.8	52
54	5.1	4.4	4.1	4.0	3.3	54
56	4.5	4.2	3.8	3.7	3.3	56
58	4.5	3.9	3.5	3.5	2.8	58
60	4.0	3.6	3.3	3.2	2.6	60
62	3.7	3.4	3.1	2.9	2.4	62
64	3.3	3.0	2.8	2.7	2.2	64
66	2.9	3.0	2.6	2.5	2.0	66
68	2.6	2.6	2.4	2.4	1.9	68
70	2.3	2.4	2.1	2.1	1.7	70
72		2.1	2.1	2.0		72
74			1.8	1.8		74
76			1.7	1.7		76
78				1.6		78
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	2	2	2	1	1	倍率n
吊钩 Hook	35t	35t	35t	11t	11t	吊钩 Hook

起重性能表

Lifting capacities



T 63.1~82.0m


m	63.1-82m T	24m J	9.19m×8.3m	360°	90t	m
	63.1	67.6	72.1	76.5	82	
	24	24	24	24	24	
16	7.0					16
18	6.9	6.3				18
20	6.5	6.3	5.7			20
22	6.1	6.0	5.6	5.0		22
24	5.7	5.6	5.4	4.9	4.4	24
26	5.4	5.3	5.1	4.8	4.4	26
28	5.1	5.0	4.9	4.6	4.3	28
30	4.7	4.7	4.6	4.4	4.2	30
32	4.5	4.5	4.4	4.2	4.1	32
34	4.2	4.2	4.2	4.1	3.9	34
36	3.9	4.1	4.1	4.0	3.8	36
38	3.8	3.9	3.9	3.8	3.7	38
40	3.6	3.7	3.7	3.7	3.6	40
42	3.5	3.5	3.6	3.5	3.4	42
44	3.3	3.3	3.3	3.4	3.3	44
46	3.1	3.2	3.2	3.3	3.2	46
48	3.0	3.1	3.1	3.2	3.1	48
50	2.9	3.0	3.0	3.0	3.0	50
52	2.8	2.9	2.9	2.9	2.9	52
54	2.7	2.8	2.8	2.8	2.8	54
56	2.6	2.6	2.7	2.7	2.7	56
58	2.5	2.5	2.6	2.6	2.5	58
60	2.3	2.4	2.4	2.5	2.4	60
62	2.3	2.3	2.4	2.5	2.2	62
64	2.2	2.3	2.3	2.3	1.9	64
66	2.1	2.2	2.2	2.3	1.9	66
68	2.1	2.2	2.2	2.0	1.8	68
70	2.0	2.1	2.1	1.9	1.6	70
72	1.9	2.0	2.0	1.8	1.4	72
74	1.9	2.0	1.9	1.7	1.2	74
76	1.8	1.9	1.8	1.5		76
78	1.7	1.8	1.6	1.3		78
80	1.6	1.7	1.4	1.2		80
82			1.2			82
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起重性能表

Lifting capacities

T 63.1~76.5m







 m	63.1	67.6	72.1	76.5	 m
	36	36	36	36	
20	3.8				20
22	3.5	3.4			22
24	3.3	3.2	3.0		24
26	3.1	3.0	3.0	2.8	26
28	2.9	2.9	2.8	2.7	28
30	2.7	2.8	2.7	2.5	30
32	2.5	2.6	2.5	2.4	32
34	2.4	2.4	2.3	2.3	34
36	2.2	2.2	2.2	2.2	36
38	2.1	2.1	2.1	2.1	38
40	2.0	2.0	2.0	2.0	40
42	1.9	1.9	1.9	1.9	42
44	1.8	1.8	1.8	1.8	44
46	1.7	1.7	1.7	1.7	46
48	1.6	1.6	1.6	1.6	48
50	1.5	1.5	1.5	1.5	50
52	1.4	1.4	1.4	1.4	52
54	1.2	1.4	1.4	1.4	54
56	1.2	1.3	1.3	1.3	56
58	1.2	1.2	1.3	1.3	58
60	1.1	1.1	1.3	1.3	60
62	1.0	1.1	1.2	1.2	62
64	1.0	1.1	1.1	1.1	64
66		1.0	1.1		66
组合C	2222111	2222211	2222221	2222222	组合C
倍率n	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	吊钩 Hook

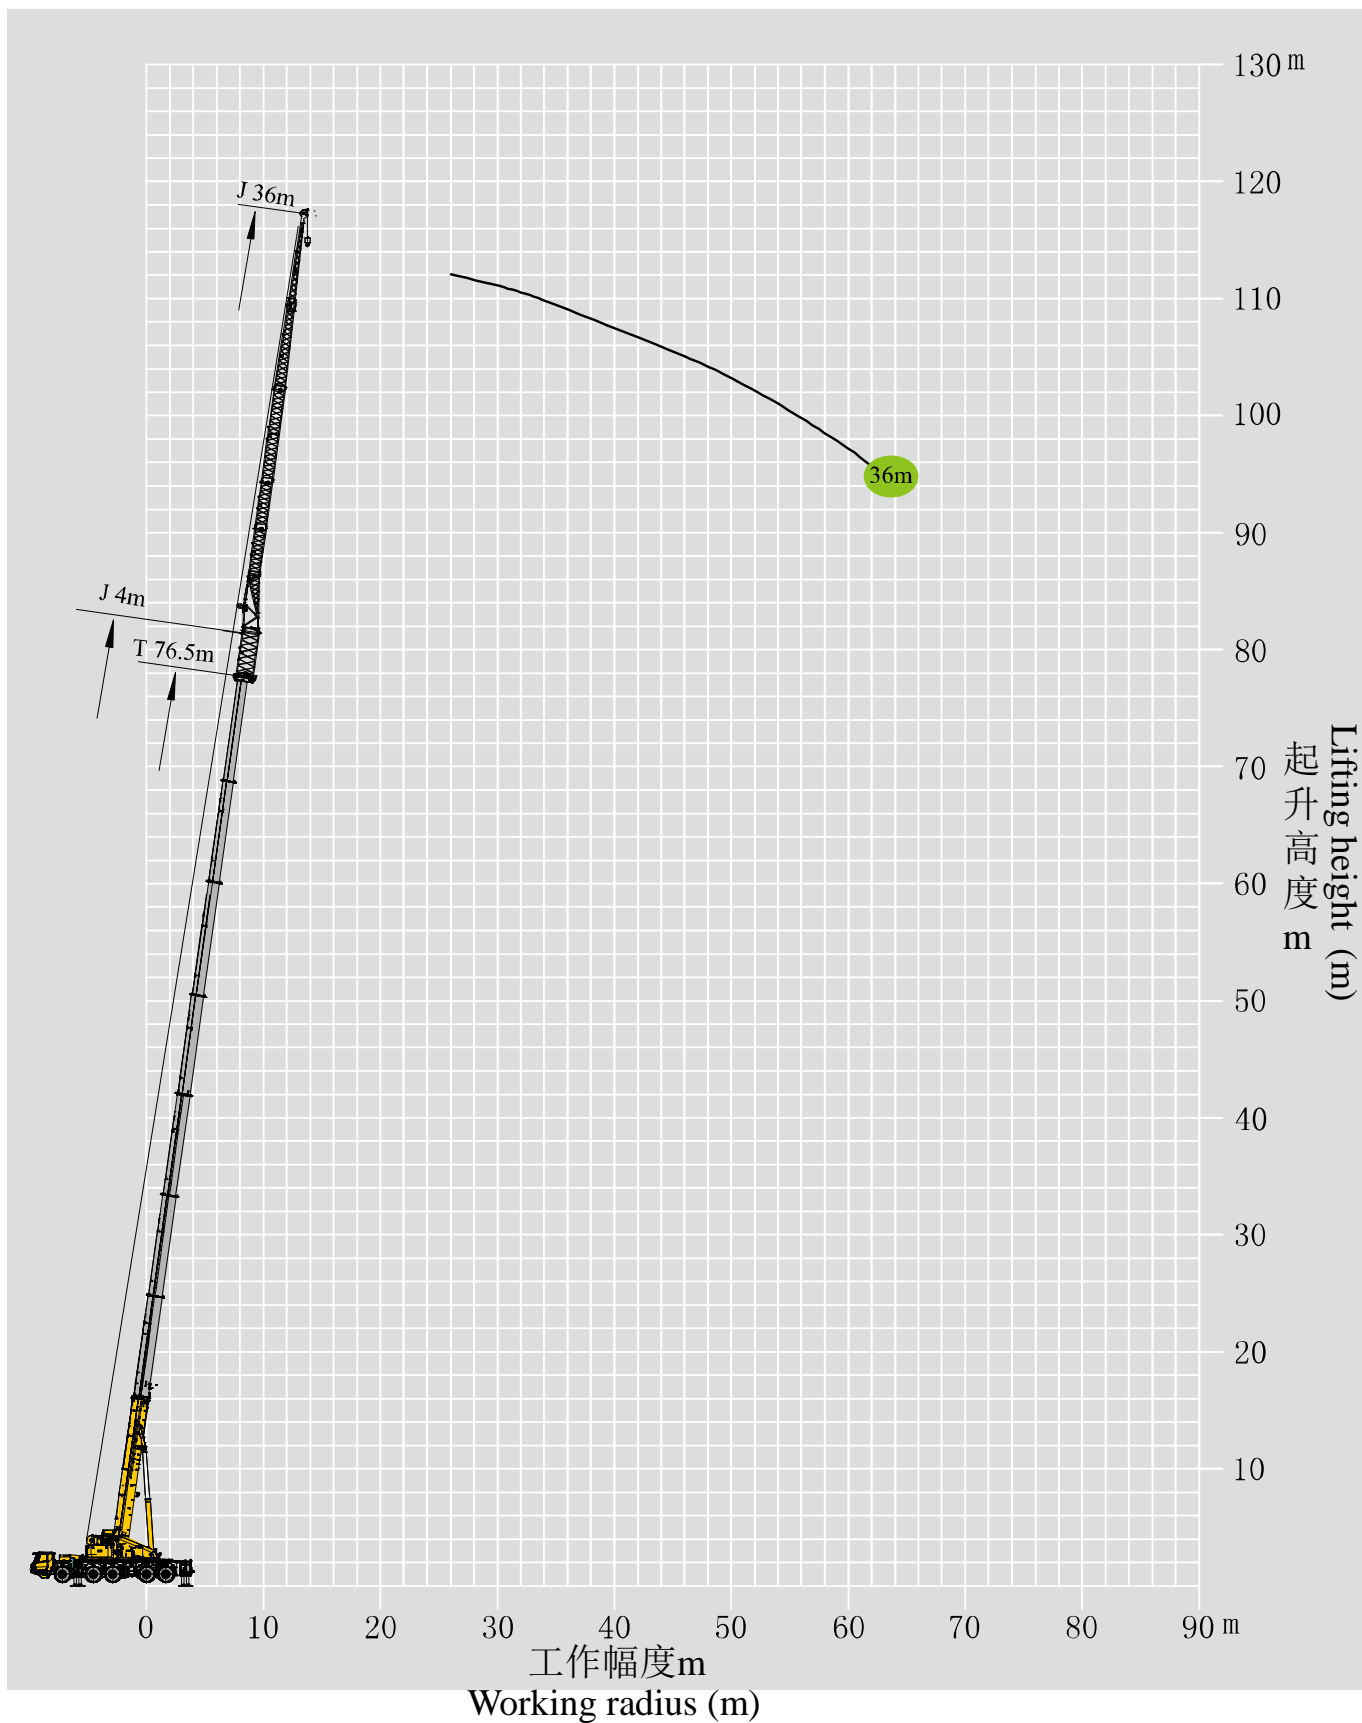


起重性能表

Lifting capacities

T 63.1~76.5m

m	     				m
	63.1+4	67.6+4	72.1+4	76.5+4	
	36	36	36	36	
20	3.4				20
22	3.4	3.4			22
24	3.3	3.3	3.0		24
26	3.1	3.0	2.9	2.6	26
28	2.9	2.9	2.8	2.5	28
30	2.7	2.8	2.6	2.4	30
32	2.6	2.6	2.5	2.4	32
34	2.4	2.5	2.4	2.3	34
36	2.3	2.3	2.3	2.2	36
38	2.2	2.2	2.2	2.1	38
40	2.1	2.1	2.0	2.0	40
42	2.0	2.0	1.9	1.9	42
44	1.9	1.9	1.8	1.8	44
46	1.8	1.8	1.7	1.7	46
48	1.7	1.7	1.7	1.6	48
50	1.6	1.6	1.6	1.5	50
52	1.5	1.5	1.5	1.5	52
54	1.3	1.4	1.4	1.4	54
56	1.3	1.3	1.4	1.2	56
58	1.3	1.3	1.3	1.2	58
60	1.2	1.3	1.3	1.2	60
62	1.1	1.2	1.2	1.2	62
64	1.1	1.1	1.2		64
66		1.1	1.1		66
组合C	2222111	2222211	2222221	2222222	组合C
倍率n	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	吊钩 Hook

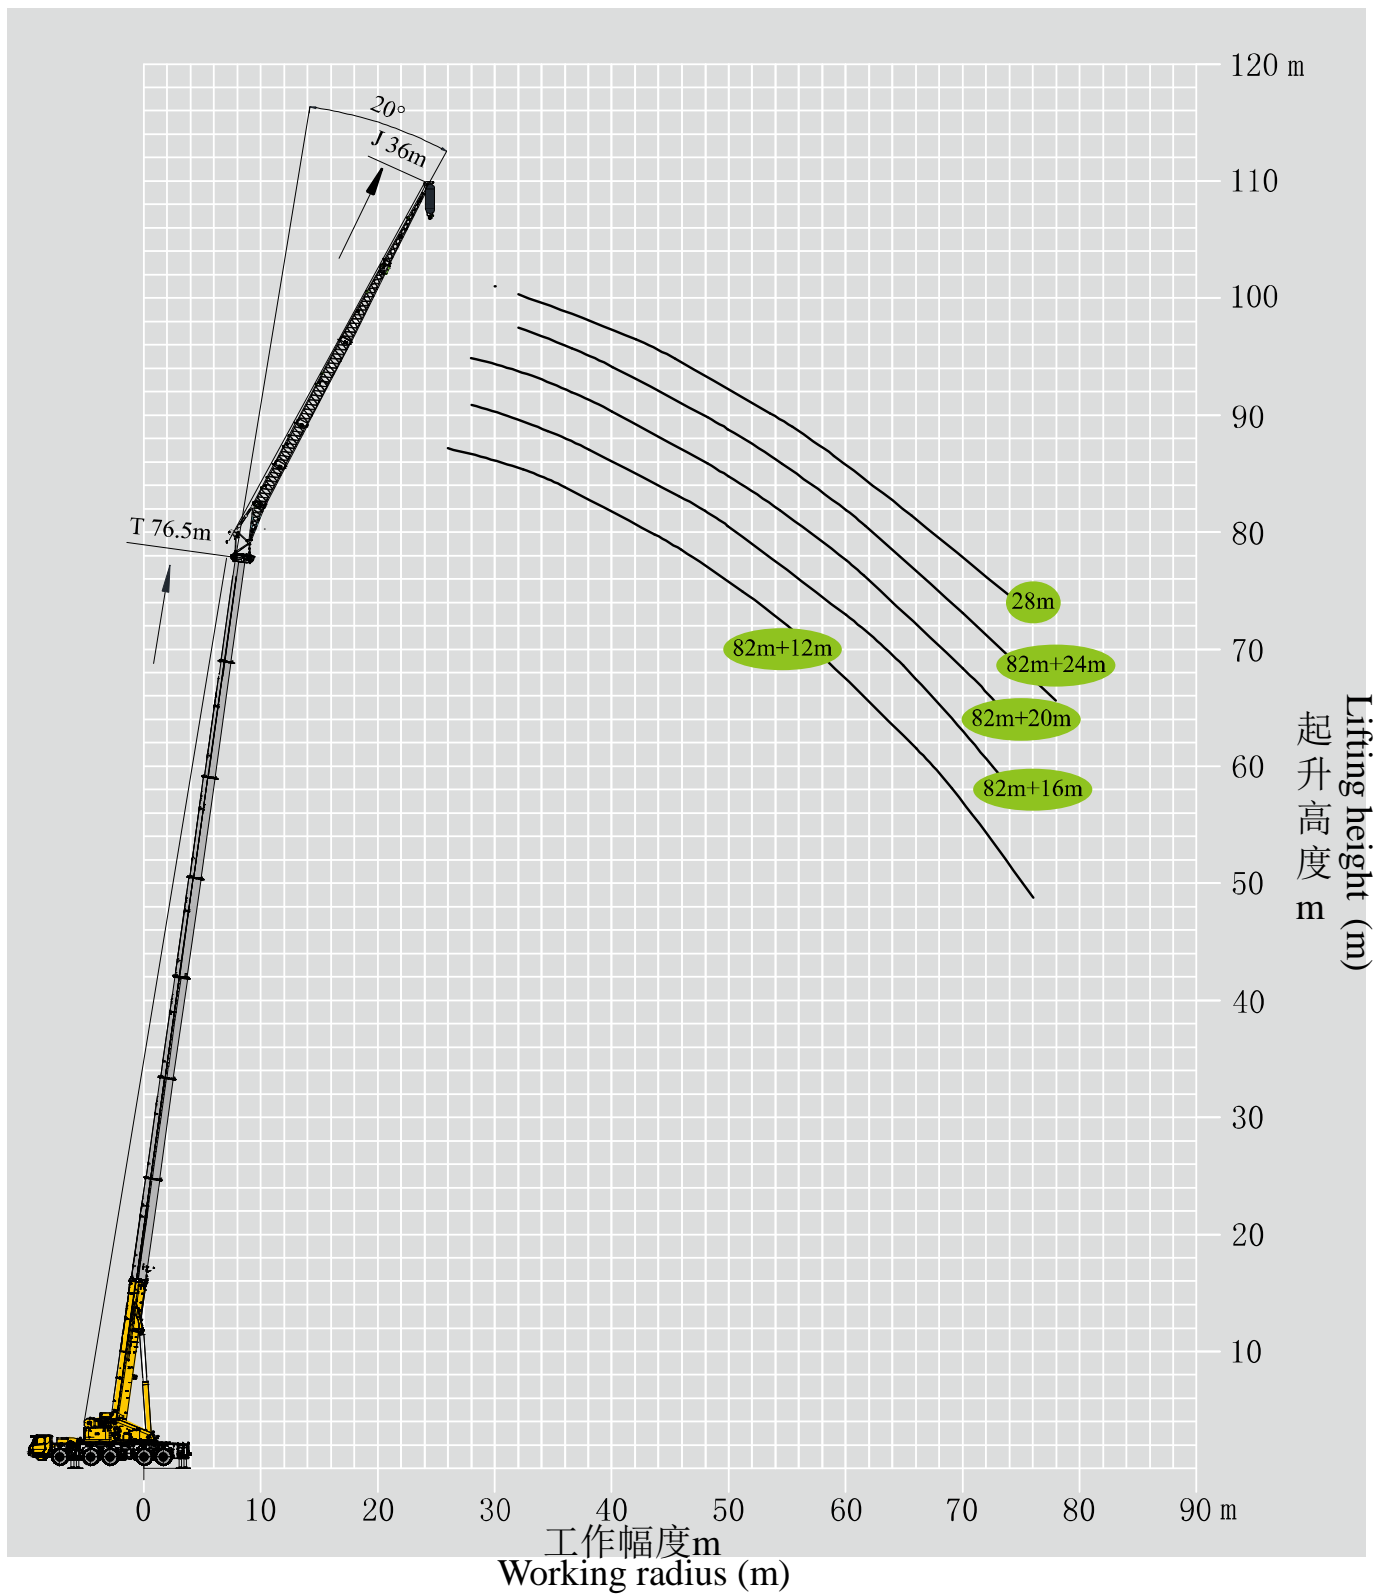

起重性能表

Lifting capacities






T 63.1~82.0m

m	63.1-82.0m	12m	9.19m×8.3m	360°	90t	m
	63.1	67.6	72.1	76.5	82	
12	12	12	12	12	12	12
18	10.8					18
20	10.0	9.6				20
22	9.6	9.6	9.7			22
24	9.4	9.6	9.5	8.3		24
26	9.2	9.2	9.2	7.9	6.3	26
28	8.9	9.0	8.7	7.5	6.2	28
30	8.5	8.5	8.5	7.3	6.0	30
32	8.0	7.9	8.0	7.1	5.8	32
34	7.8	7.7	7.8	6.8	5.7	34
36	7.5	7.5	7.4	6.6	5.5	36
38	7.0	7.0	7.2	6.4	5.4	38
40	6.8	6.7	7.1	6.2	5.2	40
42	6.4	6.3	6.6	5.9	5.1	42
44	6.0	6.0	6.1	5.7	4.9	44
46	5.7	5.7	5.7	5.3	4.8	46
48	5.5	5.4	5.3	5.0	4.3	48
50	5.3	5.2	4.9	4.8	4.1	50
52	5.2	4.9	4.5	4.3	3.8	52
54	5.0	4.7	4.2	4.2	3.5	54
56	4.8	4.3	4.0	3.8	3.3	56
58	4.6	4.0	3.7	3.6	3.1	58
60	4.1	3.6	3.4	3.3	2.7	60
62	3.9	3.5	3.2	3.0	2.6	62
64	3.5	3.1	3.0	2.9	2.3	64
66	3.1	3.0	2.8	2.5	2.3	66
68	2.8	2.7	2.4	2.5	2.0	68
70	2.4	2.6	2.3	2.2	1.7	70
72		2.3	2.0	2.1	1.7	72
74		1.9	1.9	1.9	1.5	74
76				1.7	1.4	76
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起重性能表

Lifting capacities

T 63.1~82.0m


m	    					m
	63.1	67.6	72.1	76.5	82	
24	24	24	24	24	24	24
26	3.4					24
28	3.3	3.2				26
30	3.2	3.1	3.1			28
32	3.1	3.0	3.0	2.9		30
34	3.0	2.9	2.9	2.8	2.8	32
36	2.9	2.8	2.8	2.7	2.7	34
38	2.8	2.7	2.7	2.7	2.6	36
40	2.7	2.6	2.6	2.6	2.6	38
42	2.6	2.6	2.6	2.5	2.5	40
44	2.4	2.5	2.5	2.5	2.4	42
46	2.4	2.4	2.4	2.4	2.4	44
48	2.3	2.4	2.4	2.3	2.3	46
50	2.3	2.3	2.3	2.3	2.3	48
52	2.2	2.2	2.3	2.2	2.2	50
54	2.1	2.1	2.1	2.1	2.1	52
56	2.1	2.1	2.1	2.1	2.1	54
58	2.0	2.1	2.0	2.0	2.1	56
60	2.0	2.0	2.0	2.0	2.0	58
62	1.9	2.0	2.0	2.0	2.0	60
64	1.9	1.9	1.9	1.9	1.9	62
66	1.9	1.9	1.9	1.9	1.9	64
68	1.8	1.8	1.8	1.8	1.9	66
70	1.8	1.8	1.8	1.8	1.8	68
72	1.8	1.8	1.8	1.8	1.8	70
74	1.7	1.8	1.8	1.8	1.8	72
76	1.7	1.7	1.7	1.8	1.8	74
78	1.7	1.7	1.7	1.7	1.7	76
80	1.7	1.7	1.7	1.6	1.7	78
82		1.7	1.7			80
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起重性能表

Lifting capacities

T 63.1~76.5m

m	63.1-76.5m	32m	9.19m×8.3m	360°	90t	m	
	63.1	32	67.6	72.1	76.5		
28	32	32	32	32	32	28	
30	2.1		1.9			30	
32	2.0		1.8			32	
34	1.9		1.8		1.7	34	
36	1.8		1.7		1.7	36	
38	1.7		1.6		1.6	38	
40	1.7		1.6		1.5	40	
42	1.6		1.5		1.5	42	
44	1.5		1.5		1.5	44	
46	1.5		1.4		1.4	46	
48	1.4		1.3		1.4	48	
50	1.4		1.3		1.2	50	
52	1.2		1.3		1.2	52	
54	1.2		1.2		1.2	54	
56	1.2		1.2		1.2	56	
58	1.2		1.2		1.1	58	
60	1.1		1.2		1.1	60	
62	1.1		1.1		1.1	62	
64	1.1		1.1		1.1	64	
66	1.0		1.0		1.1	66	
68	1.0		1.0		1.0	68	
70	1.0		1.0		1.0	70	
72			1.0			72	
74			1.0			74	
组合C	2222111		2222211		2222221	2222222	组合C
倍率n	1		1		1	1	倍率n
吊钩 Hook	11t		11t		11t	11t	吊钩 Hook

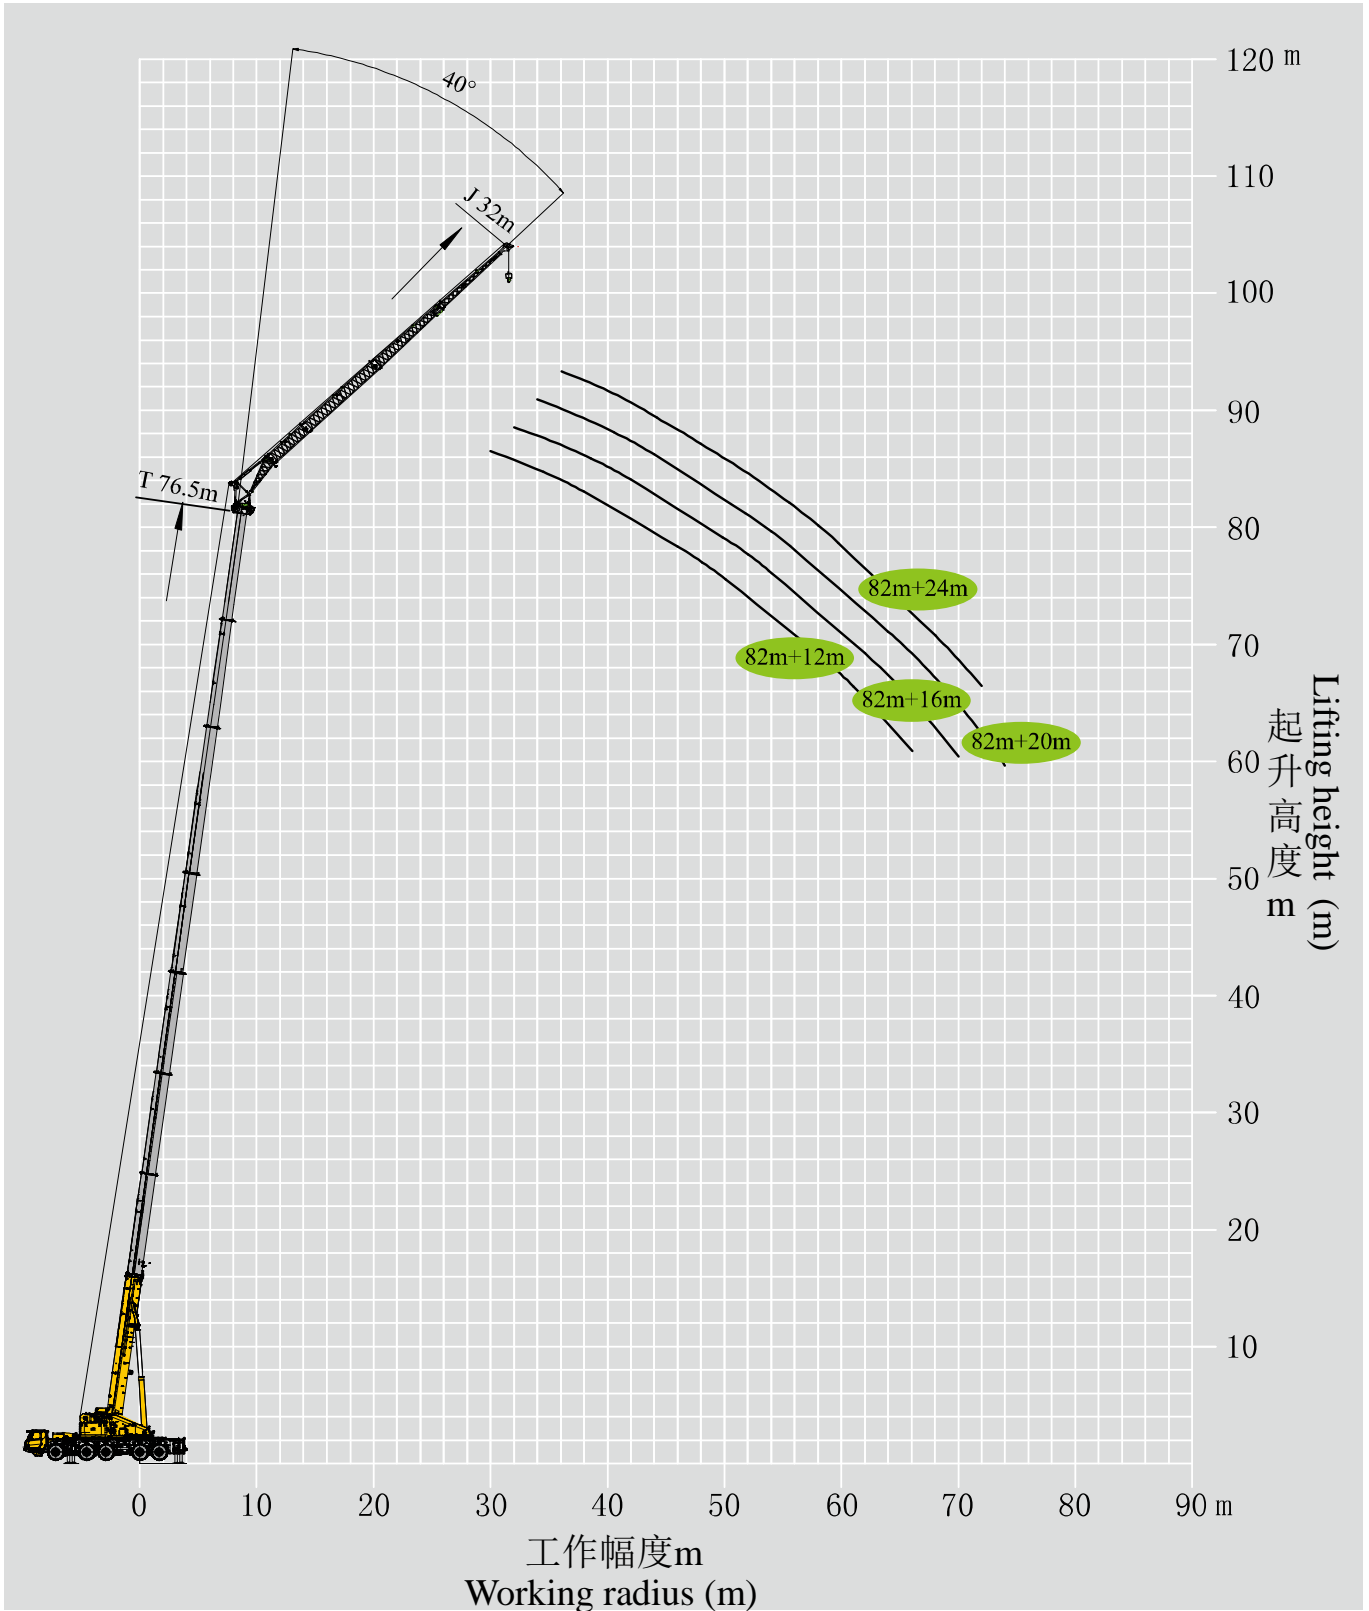

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82.0m	12m	9.19m×8.3m	360°	90t	m
	T	J				
	63.1	67.6	72.1	76.5	82	
	12	12	12	12	12	
22	6.5					22
24	6.4	6.3				24
26	6.2	6.2	6.3			26
28	6.1	6.0	6.2	5.8		28
30	5.9	5.9	6.0	5.6	5.2	30
32	5.8	5.8	5.8	5.4	5.1	32
34	5.7	5.7	5.7	5.3	4.9	34
36	5.5	5.6	5.6	5.1	4.7	36
38	5.5	5.5	5.5	4.9	4.7	38
40	5.3	5.3	5.4	4.8	4.5	40
42	5.3	5.3	5.4	4.7	4.3	42
44	5.2	5.3	5.3	4.5	4.2	44
46	5.2	5.2	5.2	4.4	4.1	46
48	5.2	5.2	5.0	4.2	4.0	48
50	5.1	5.1	4.9	4.1	3.9	50
52	5.0	5.0	4.6	4.0	3.8	52
54		4.9	4.6	3.9	3.7	54
56		4.5	4.1	3.9	3.4	56
58			4.0	3.8	3.1	58
60				3.5	3.0	60
62				3.3	2.6	62
64					2.6	64
66					2.3	66
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82.0m	20m	9.19m×8.3m	360°	90t	m
	T	J				
	63.1	67.6	72.1	76.5	82	
	20	20	20	20	20	
26	2.6					26
28	2.4	2.4				28
30	2.4	2.4	2.4			30
32	2.4	2.4	2.4	2.4		32
34	2.3	2.3	2.4	2.4	2.2	34
36	2.2	2.2	2.2	2.3	2.2	36
38	2.2	2.2	2.2	2.2	2.2	38
40	2.2	2.2	2.2	2.2	2.2	40
42	2.2	2.2	2.2	2.2	2.2	42
44	2.1	2.2	2.2	2.2	2.2	44
46	2.1	2.1	2.2	2.2	2.2	46
48	2.1	2.1	2.1	2.1	2.2	48
50	2.0	2.1	2.1	2.1	2.1	50
52	2.0	2.0	2.1	2.1	2.0	52
54	2.0	2.0	2.0	2.1	2.0	54
56	2.0	2.0	2.0	2.0	1.9	56
58	1.9	2.0	2.0	2.0	1.9	58
60	1.9	1.9	2.0	1.9	1.9	60
62	1.9	1.9	2.0	1.9	1.8	62
64	1.9	1.9	2.0	1.9	1.8	64
66		1.9	2.0	1.9	1.7	66
68			1.9	1.8	1.7	68
70				1.7	1.7	70
72					1.6	72
74					1.6	74
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起重性能表


Lifting capacities

T 63.1~82.0m

m	63.1-82.0m	24m	9.19m×8.3m	360°	90t	m
	T	J				
	63.1	67.6	72.1	76.5	82	
	24	24	24	24	24	
28	2.2					28
30	2.1	2.0				30
32	2.0	2.0	1.9			32
34	1.9	1.9	1.9	1.9		34
36	1.9	1.9	1.9	1.9	1.9	36
38	1.8	1.9	1.8	1.8	1.8	38
40	1.8	1.8	1.8	1.8	1.8	40
42	1.8	1.8	1.8	1.8	1.7	42
44	1.7	1.8	1.7	1.7	1.7	44
46	1.7	1.7	1.7	1.7	1.7	46
48	1.7	1.7	1.7	1.7	1.7	48
50	1.6	1.7	1.7	1.6	1.6	50
52	1.6	1.6	1.7	1.6	1.6	52
54	1.6	1.6	1.7	1.6	1.6	54
56	1.6	1.6	1.6	1.6	1.6	56
58	1.6	1.6	1.6	1.6	1.6	58
60	1.6	1.6	1.6	1.6	1.6	60
62	1.6	1.6	1.6	1.6	1.6	62
64	1.5	1.6	1.6	1.6	1.6	64
66		1.6	1.6	1.6	1.6	66
68		1.6	1.6	1.6	1.5	68
70			1.6	1.6	1.5	70
72			1.5	1.6	1.5	72
74				1.6		74
76				1.6		76
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	1	1	1	1	1	倍率n
吊钩 Hook	11t	11t	11t	11t	11t	吊钩 Hook

起升高度曲线图
Lifting heights

超起+固定副臂0°
Super lifting device + fixed Jib 0°

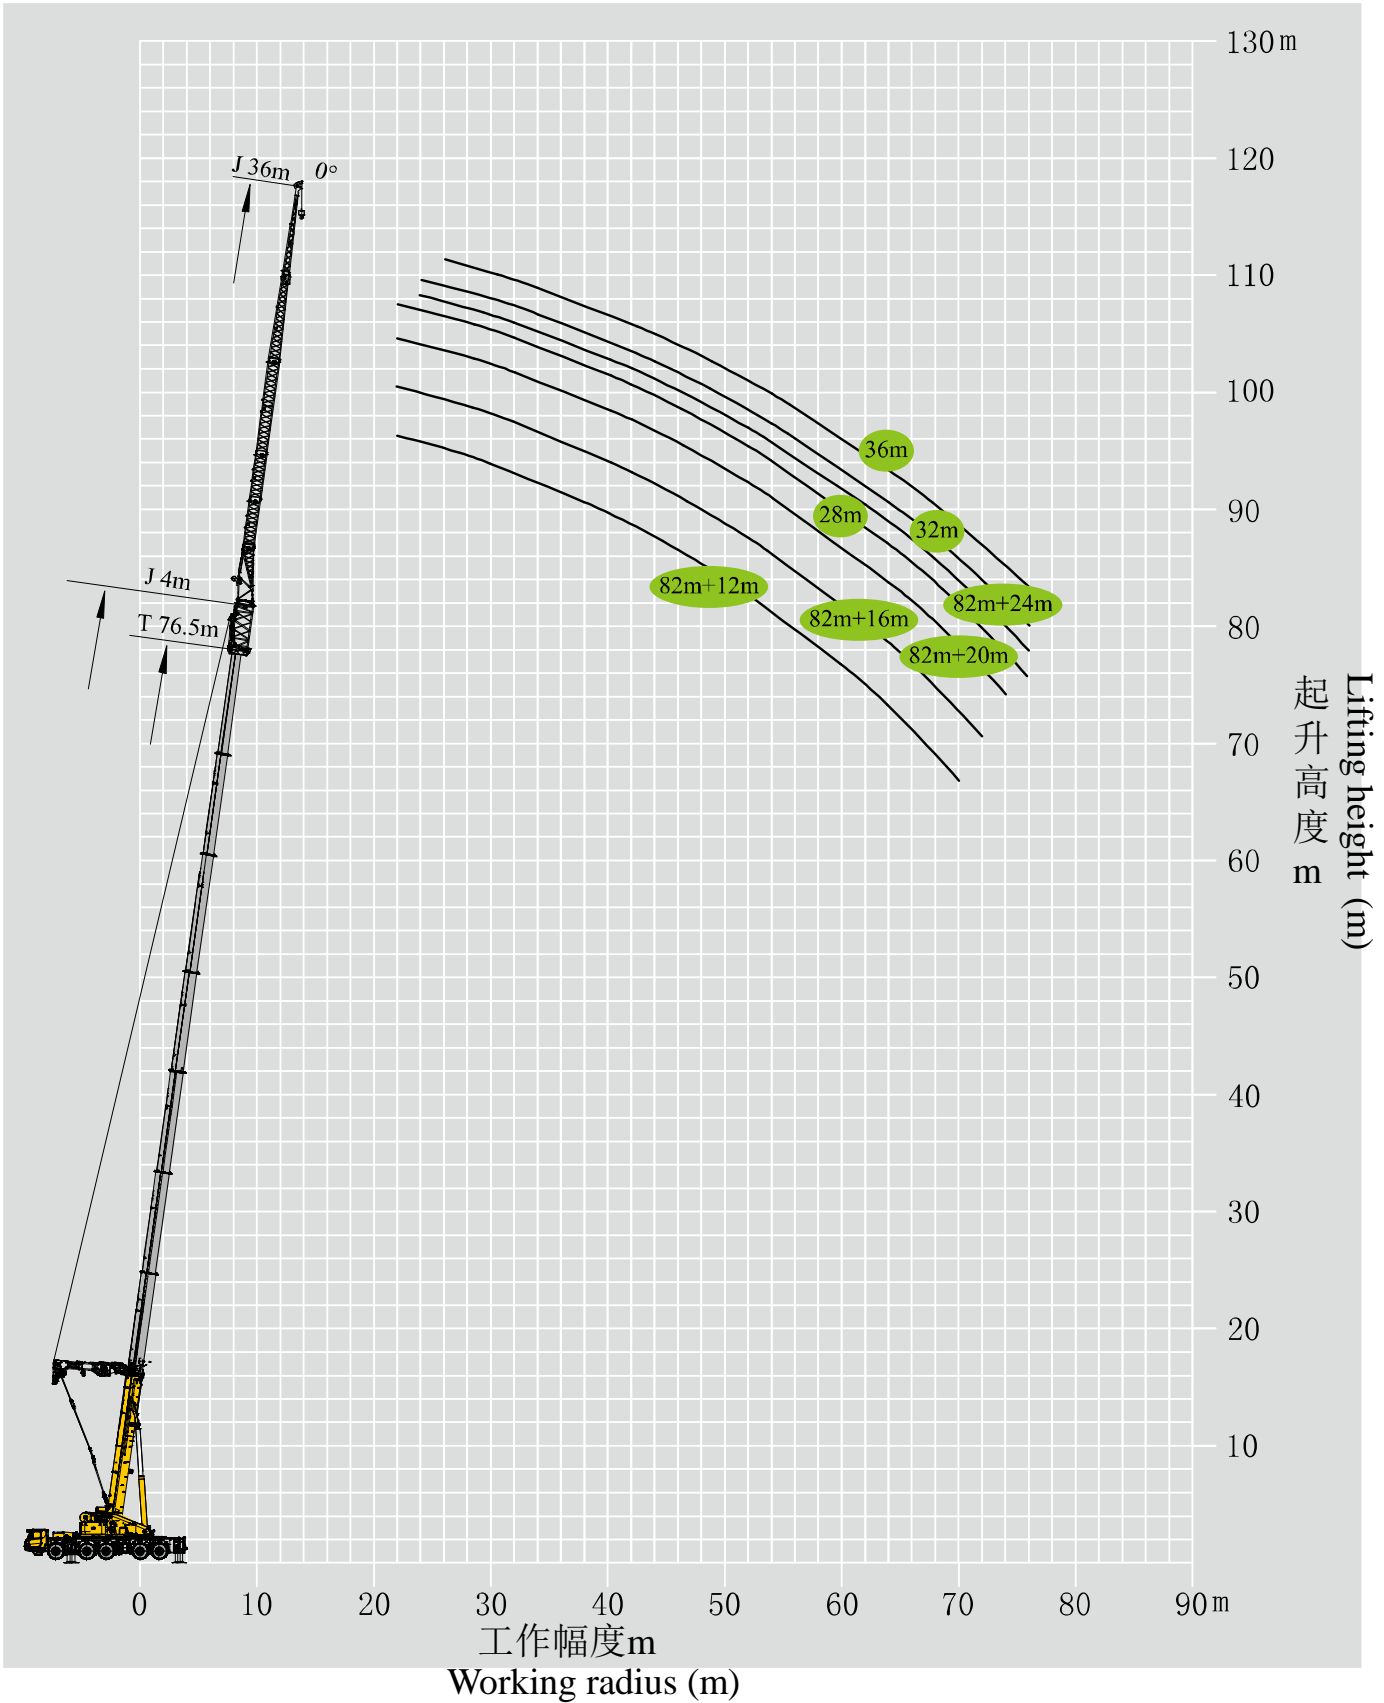

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82.0m T	4m	12m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
	12	12	12	12	12	12	
14	20.8						14
16	19.9	18.6					16
18	18.9	17.8	16.6				18
20	18.1	17.0	16.1	15.0			20
22	17.1	16.1	15.4	14.6	8.4		22
24	15.9	15.3	14.7	13.7	8.4		24
26	15.0	14.8	14.1	13.3	8.3		26
28	14.2	14.0	13.5	12.9	8.3		28
30	13.7	13.5	12.9	12.3	8.2		30
32	12.9	12.7	12.2	11.9	8.2		32
34	12.5	12.2	11.7	11.4	8.2		34
36	12.0	11.7	11.3	11.0	8.1		36
38	11.1	11.3	10.9	10.5	8.1		38
40	10.0	10.2	10.4	10.1	8.0		40
42	9.0	9.1	9.4	9.6	7.7		42
44	8.0	8.1	8.4	8.7	7.3		44
46	7.1	7.3	7.5	7.8	6.9		46
48	6.3	6.4	6.7	7.0	6.6		48
50	5.5	5.7	5.9	6.2	6.2		50
52	4.9	5.0	5.3	5.5	5.5		52
54	4.2	4.4	4.6	4.9	4.9		54
56	3.7	3.8	4.1	4.3	4.3		56
58	3.1	3.3	3.5	3.8	3.8		58
60	2.6	2.8	3.0	3.3	3.2		60
62	2.2	2.3	2.6	2.8	2.5		62
64	1.7	1.9	2.1	2.4	2.3		64
66	1.3	1.5	1.7	2.0	2.0		66
68			1.3	1.6	1.6		68
70				1.3	1.2		70
组合C	2222111	2222211	2222221	2222222	3333333		组合C
倍率n	2	2	2	2	1		倍率n
吊钩	35t	35t	35t	35t	11t		吊钩
Hook							Hook

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82.0m T	4m	24m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
	24	24	24	24	24	24	
16	8.6						16
18	8.6	8.3					18
20	8.1	8.2	8.0				20
22	7.4	7.6	7.9	7.4			22
24	6.8	7.0	7.1	7.2	4.9		24
26	6.3	6.5	6.6	6.7	4.9		26
28	5.8	6.0	6.1	6.3	4.9		28
30	5.4	5.5	5.8	6.0	4.9		30
32	5.0	5.3	5.4	5.6	4.8		32
34	4.7	4.9	5.1	5.3	4.8		34
36	4.4	4.7	4.8	5.0	4.6		36
38	4.2	4.4	4.6	4.7	4.4		38
40	3.9	4.2	4.3	4.5	4.2		40
42	3.7	3.9	4.1	4.2	4.0		42
44	3.6	3.8	3.9	4.0	3.8		44
46	3.4	3.6	3.7	3.9	3.7		46
48	3.2	3.4	3.6	3.7	3.6		48
50	3.0	3.2	3.4	3.5	3.5		50
52	2.9	3.1	3.2	3.4	3.3		52
54	2.8	2.9	3.1	3.3	3.2		54
56	2.7	2.9	3.0	3.2	3.1		56
58	2.7	2.7	2.9	3.0	3.0		58
60	2.5	2.6	2.8	3.0	2.9		60
62	2.4	2.6	2.7	2.8	2.9		62
64	2.3	2.4	2.6	2.8	2.7		64
66	2.3	2.4	2.5	2.6	2.6		66
68	2.0	2.1	2.2	2.4	2.0		68
70	1.7	1.7	1.9	2.0	1.7		70
72	1.3	1.4	1.5	1.7	1.5		72
74	1.0	1.1	1.2	1.4	1.3		74
76				1.1	1.1		76
组合C	2222111	2222211	2222221	2222222	3333333		组合C
倍率n	1	1	1	1	1		倍率n
吊钩 Hook	11t	11t	11t	11t	11t		吊钩 Hook

起重性能表


Lifting capacities

T 63.1~76.5m

m	63.1-76.5m T	4m	36m J	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4			
	36	36	36	36			
20	5.3						20
22	5.0	5.0					22
24	4.8	5.0	4.6				24
26	4.5	4.6	4.6	4.2			26
28	4.2	4.3	4.3	4.2			28
30	3.9	4.0	4.1	4.1			30
32	3.7	3.8	3.8	3.9			32
34	3.5	3.4	3.6	3.7			34
36	3.2	3.2	3.4	3.4			36
38	3.0	3.0	3.2	3.2			38
40	2.9	2.8	3.0	3.0			40
42	2.7	2.7	2.8	2.8			42
44	2.5	2.7	2.6	2.8			44
46	2.4	2.5	2.5	2.7			46
48	2.2	2.4	2.5	2.5			48
50	2.2	2.2	2.3	2.3			50
52	2.1	2.1	2.2	2.3			52
54	1.9	2.1	2.2	2.2			54
56	1.8	1.9	2.0	2.1			56
58	1.8	1.8	2.0	2.0			58
60	1.7	1.8	1.9	1.9			60
62	1.6	1.7	1.8	1.8			62
64	1.6	1.6	1.7	1.8			64
66	1.5	1.6	1.7	1.7			66
68	1.3	1.4	1.6	1.7			68
70	1.3	1.4	1.5	1.6			70
72	1.3	1.4	1.4	1.5			72
74	1.2	1.3	1.4	1.5			74
76	1.2	1.3	1.3	1.3			76
78	1.0	1.0	1.1	1.2			78
组合C	2222111	2222211	2222221	2222222			组合C
倍率n	1	1	1	1			倍率n
吊钩	11t	11t	11t	11t			吊钩
Hook							Hook

起升高度曲线图
Lifting heights

超起+固定副臂0°
Super lifting device + fixed Jib 0°

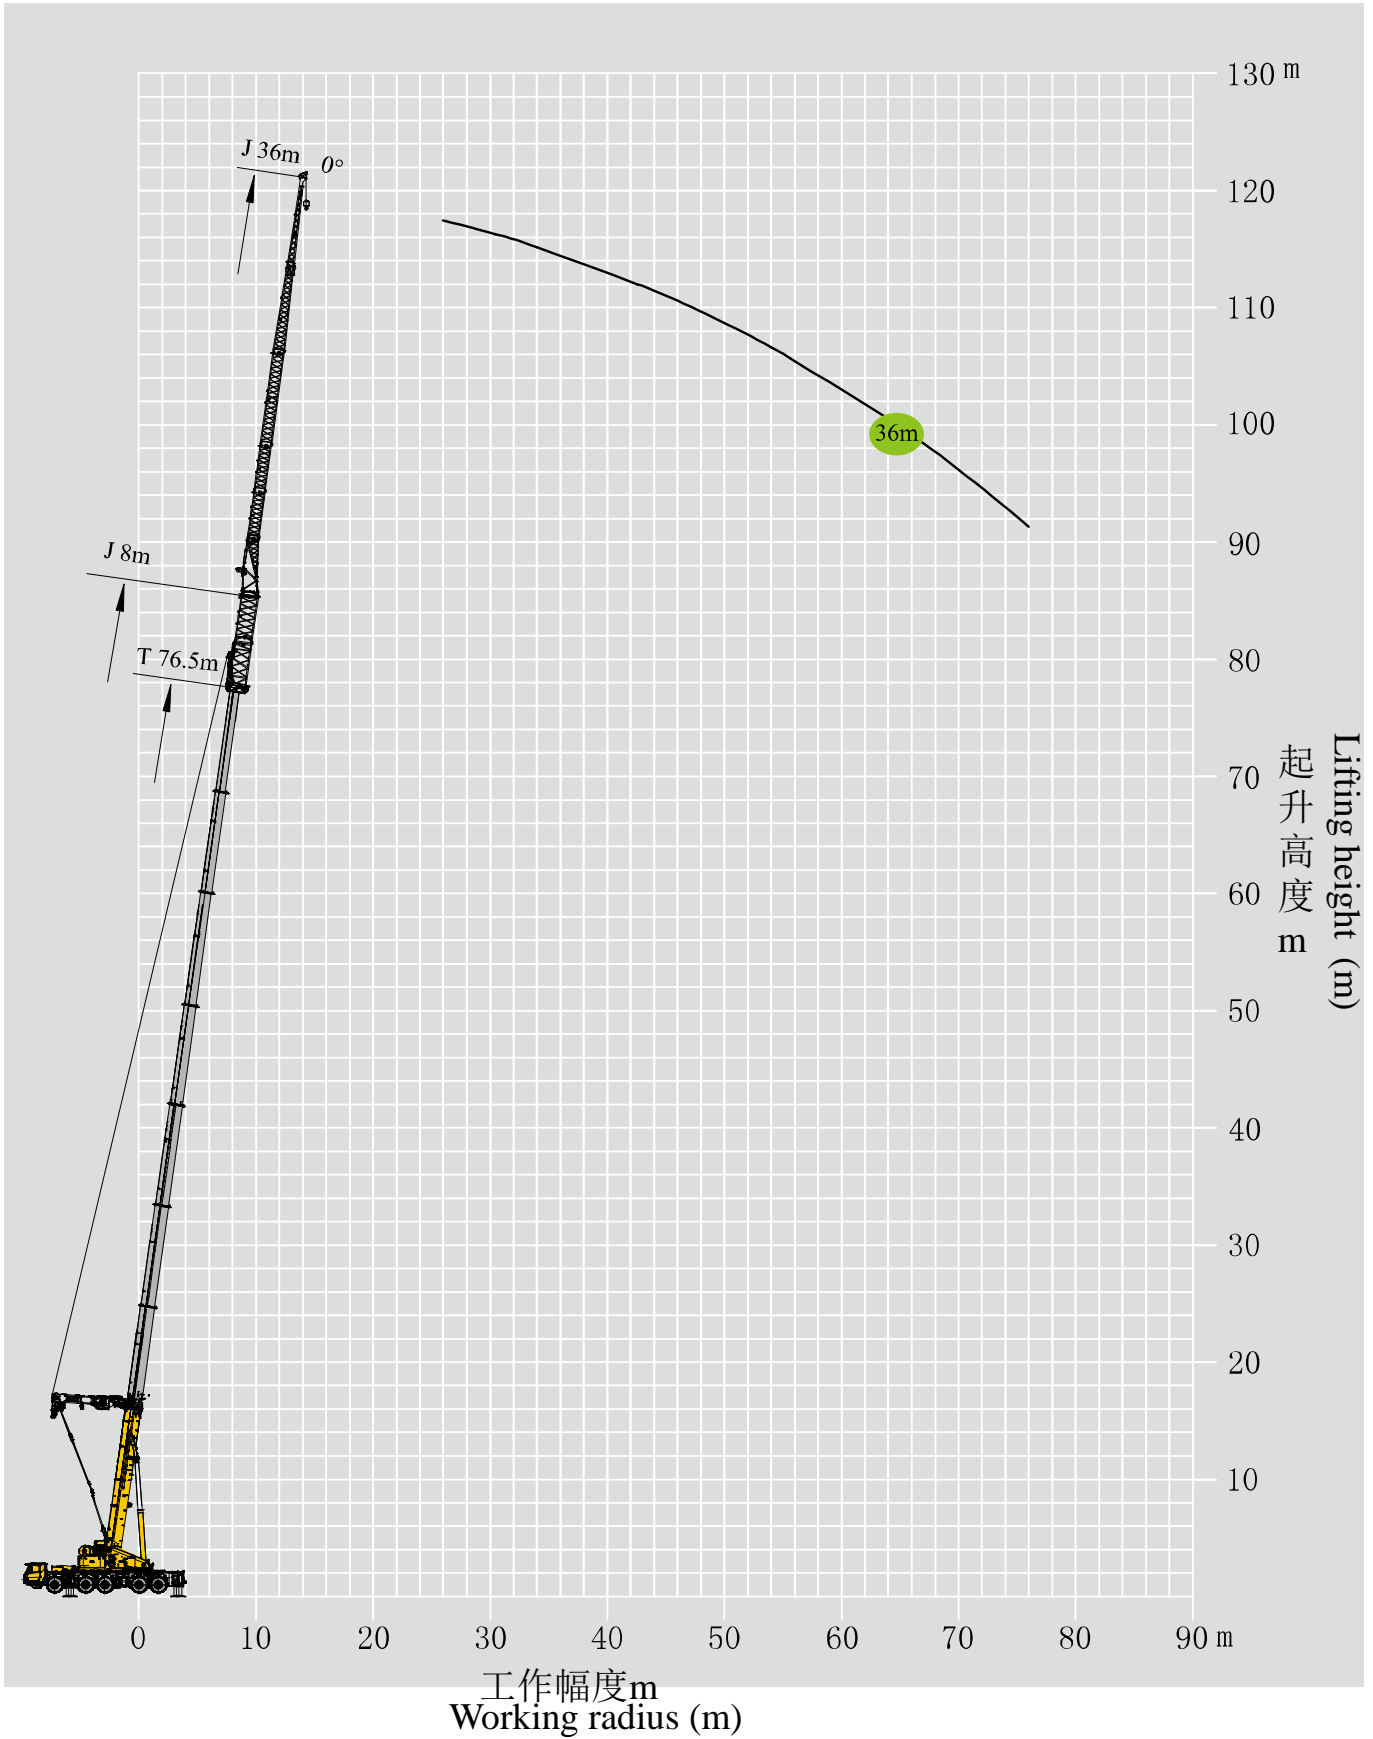

工作幅度m
Working radius (m)

起升高度
Lifting height (m)

起重性能表


Lifting capacities

T 63.1~76.5m

m	63.1-76.5m T	8m	36m	9.19m×8.3m	360°	90t	m
	63.1+8	67.6+8	72.1+8	76.5+8			
20	36	36	36	36	20		
22	4.9	4.6			22		
24	4.9	4.6	4.2		24		
26	4.6	4.6	4.2	3.6	26		
28	4.3	4.4	4.2	3.6	28		
30	4.0	4.1	4.1	3.6	30		
32	3.8	3.8	3.9	3.6	32		
34	3.6	3.5	3.7	3.6	34		
36	3.3	3.3	3.4	3.4	36		
38	3.1	3.2	3.2	3.3	38		
40	2.9	3.0	3.0	3.1	40		
42	2.8	2.8	2.8	2.9	42		
44	2.6	2.7	2.8	2.8	44		
46	2.4	2.5	2.7	2.7	46		
48	2.3	2.4	2.5	2.6	48		
50	2.3	2.3	2.4	2.4	50		
52	2.1	2.2	2.3	2.4	52		
54	2.0	2.1	2.2	2.3	54		
56	1.9	2.1	2.1	2.2	56		
58	1.9	1.9	2.0	2.1	58		
60	1.8	1.9	1.9	2.0	60		
62	1.7	1.8	1.8	1.9	62		
64	1.6	1.7	1.8	1.9	64		
66	1.6	1.6	1.7	1.8	66		
68	1.4	1.6	1.7	1.7	68		
70	1.4	1.5	1.6	1.7	70		
72	1.4	1.4	1.6	1.6	72		
74	1.3	1.3	1.4	1.5	74		
76	1.3	1.3	1.4	1.5	76		
78	1.1	1.0	1.1	1.2	78		
组合C	2222111	2222111	2222221	2222222	组合C		
倍率n	1	1	1	1	倍率n		
吊钩 Hook	11t	11t	11t	11t	吊钩 Hook		

起升高度曲线图
Lifting heights






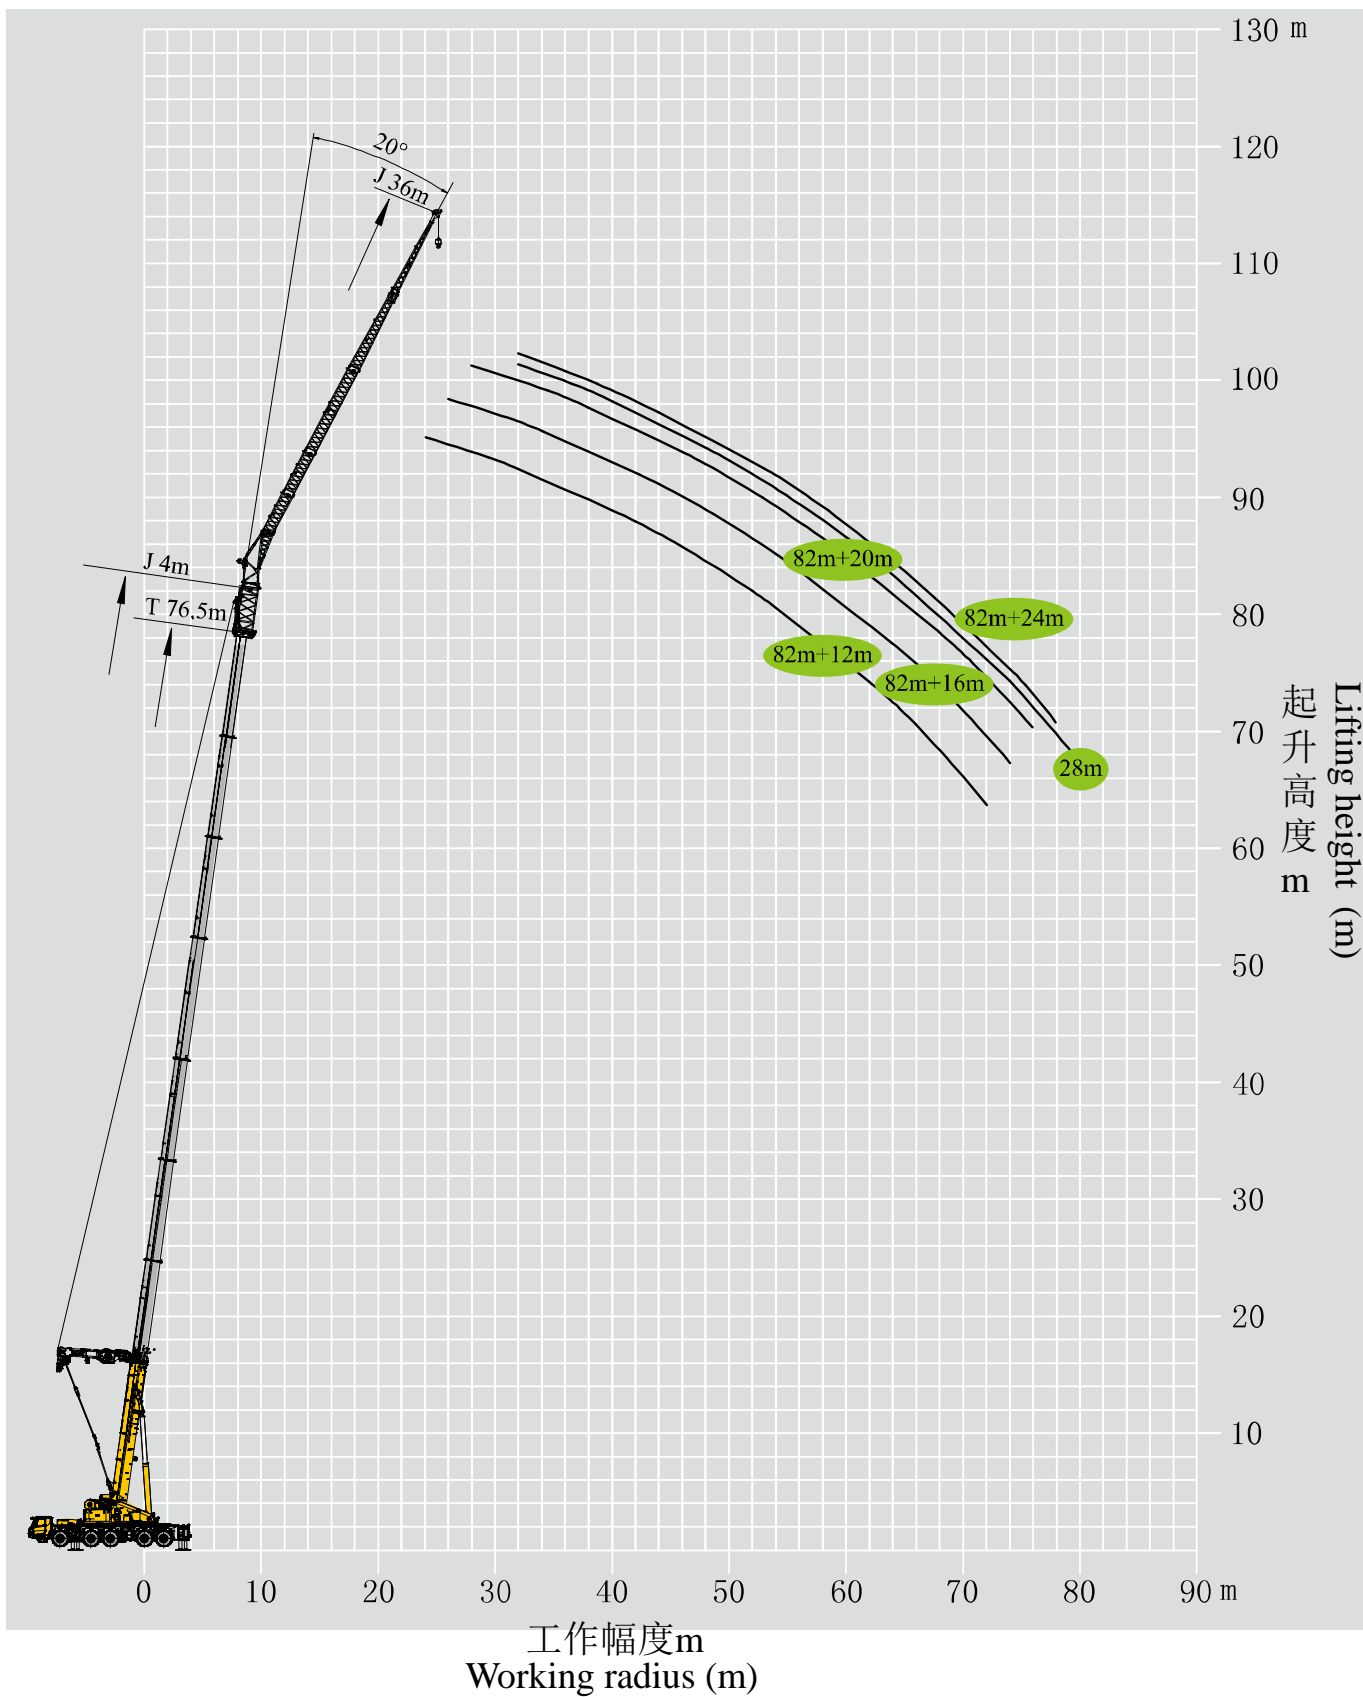
超起+固定副臂20°
Super lifting device + fixed Jib 20°



起重性能表

Lifting capacities

T 63.1~82.0m

m	     					m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4	
	12	12	12	12	12	
16	12.8					16
18	12.0	11.4				18
20	11.5	11.1	10.7			20
22	11.1	10.7	10.3	9.9		22
24	10.7	10.3	9.9	9.5	7.7	24
26	10.3	9.9	9.5	9.2	7.5	26
28	10.0	9.5	9.2	9.0	7.2	28
30	9.6	9.2	8.9	8.9	7.1	30
32	9.2	9.0	8.8	8.6	6.9	32
34	8.9	8.8	8.7	8.3	6.8	34
36	8.7	8.6	8.3	8.1	6.6	36
38	8.6	8.4	8.2	7.9	6.4	38
40	8.4	8.0	8.0	7.7	6.3	40
42	8.0	8.0	7.7	7.5	6.1	42
44	7.8	7.6	7.5	7.3	5.9	44
46	7.6	7.4	7.3	7.1	5.8	46
48	6.9	7.1	7.1	6.9	5.6	48
50	6.1	6.3	6.5	6.7	5.4	50
52	5.4	5.6	5.8	6.1	5.1	52
54	4.7	4.9	5.2	5.4	4.9	54
56	4.1	4.3	4.5	4.8	4.7	56
58	3.5	3.7	4.0	4.3	4.3	58
60	3.0	3.2	3.4	3.7	3.7	60
62	2.5	2.7	2.9	3.2	3.2	62
64	2.0	2.2	2.5	2.8	2.8	64
66	1.6	1.8	2.0	2.3	2.4	66
68		1.4	1.6	1.9	2.0	68
70			1.2	1.6	1.6	70
72				1.2	1.2	72
组合C	2222111	2222211	2222221	2222222	3333333	组合C
倍率n	2	2	1	1	1	倍率n
吊钩	35t	35t	11t	11t	11t	吊钩
Hook						Hook

起重性能表

Lifting capacities

T 63.1~82.0m

m	63.1-82.0m T	4m	20m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
20	20	20	20	20	20	20	20
20	5.2						20
22	4.9	5.0					22
24	4.8	4.8	4.9				24
26	4.4	4.7	4.7	5.0			26
28	4.2	4.3	4.5	4.8	4.8		28
30	4.1	4.2	4.3	4.6	4.8		30
32	3.9	4.1	4.3	4.4	4.6		32
34	3.8	3.7	4.2	4.2	4.4		34
36	3.7	3.7	4.0	4.2	4.3		36
38	3.6	3.6	3.9	4.0	4.1		38
40	3.4	3.6	3.8	4.0	4.1		40
42	3.4	3.5	3.8	3.7	3.8		42
44	3.3	3.5	3.7	3.7	3.8		44
46	3.2	3.5	3.5	3.5	3.8		46
48	3.1	3.2	3.5	3.5	3.6		48
50	3.1	3.2	3.4	3.5	3.6		50
52	3.0	3.2	3.4	3.3	3.4		52
54	3.0	3.2	3.2	3.2	3.4		54
56	2.9	3.1	3.2	3.2	3.4		56
58	2.9	3.0	3.2	3.1	3.4		58
60	2.8	2.9	3.0	3.0	3.2		60
62	2.7	2.9	3.0	3.0	3.1		62
64	2.7	2.9	3.0	2.9	3.1		64
66	2.6	2.8	2.8	2.9	2.9		66
68	2.1	2.4	2.6	2.8	2.7		68
70	1.7	2.0	2.2	2.4	2.4		70
72	1.4	1.4	1.8	2.0	1.5		72
74		1.2	1.3	1.5	1.5		74
76					1.3		76
组合C	2222111	2222211	2222221	2222222	3333333	组合C	
倍率n	1	1	1	1	1	倍率n	
吊钩	11t	11t	11t	11t	11t	吊钩	
Hook						Hook	

起重性能表


Lifting capacities

T 63.1~76.5m

m	63.1-76.5m T	4m	28m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4			
	28	28	28	28			
30	3.7						30
32	3.6	3.7					32
34	3.4	3.6		3.4			34
36	3.4	3.4		3.4		3.5	36
38	3.3	3.3		3.3		3.3	38
40	3.1	3.2		3.3		3.2	40
42	3.0	3.0		3.2		3.1	42
44	2.9	3.0		3.0		3.0	44
46	2.8	2.9		2.9		2.9	46
48	2.7	2.8		2.9		2.9	48
50	2.7	2.7		2.7		2.7	50
52	2.5	2.7		2.7		2.7	52
54	2.5	2.5		2.6		2.7	54
56	2.4	2.4		2.5		2.5	56
58	2.3	2.3		2.5		2.5	58
60	2.3	2.3		2.3		2.4	60
62	2.1	2.3		2.3		2.4	62
64	2.1	2.1		2.3		2.3	64
66	2.1	2.1		2.2		2.2	66
68	2.0	2.1		2.1		2.2	68
70	2.0	2.0		2.1		2.2	70
72	1.9	2.0		2.0		2.2	72
74	1.8	1.9		2.0		2.2	74
76	1.7	1.8		2.0		2.2	76
78	1.7	1.8		1.8		2.1	78
80	1.4	1.5		1.6		1.8	80
82		1.2		1.3		1.5	82
84						1.3	84
组合C	2222111	2222211		2222221		2222222	组合C
倍率n	1	1		1		1	倍率n
吊钩 Hook	11t	11t		11t		11t	吊钩 Hook

起升高度曲线图
Lifting heights

超起+固定副臂40°
Super lifting device + fixed Jib 40°

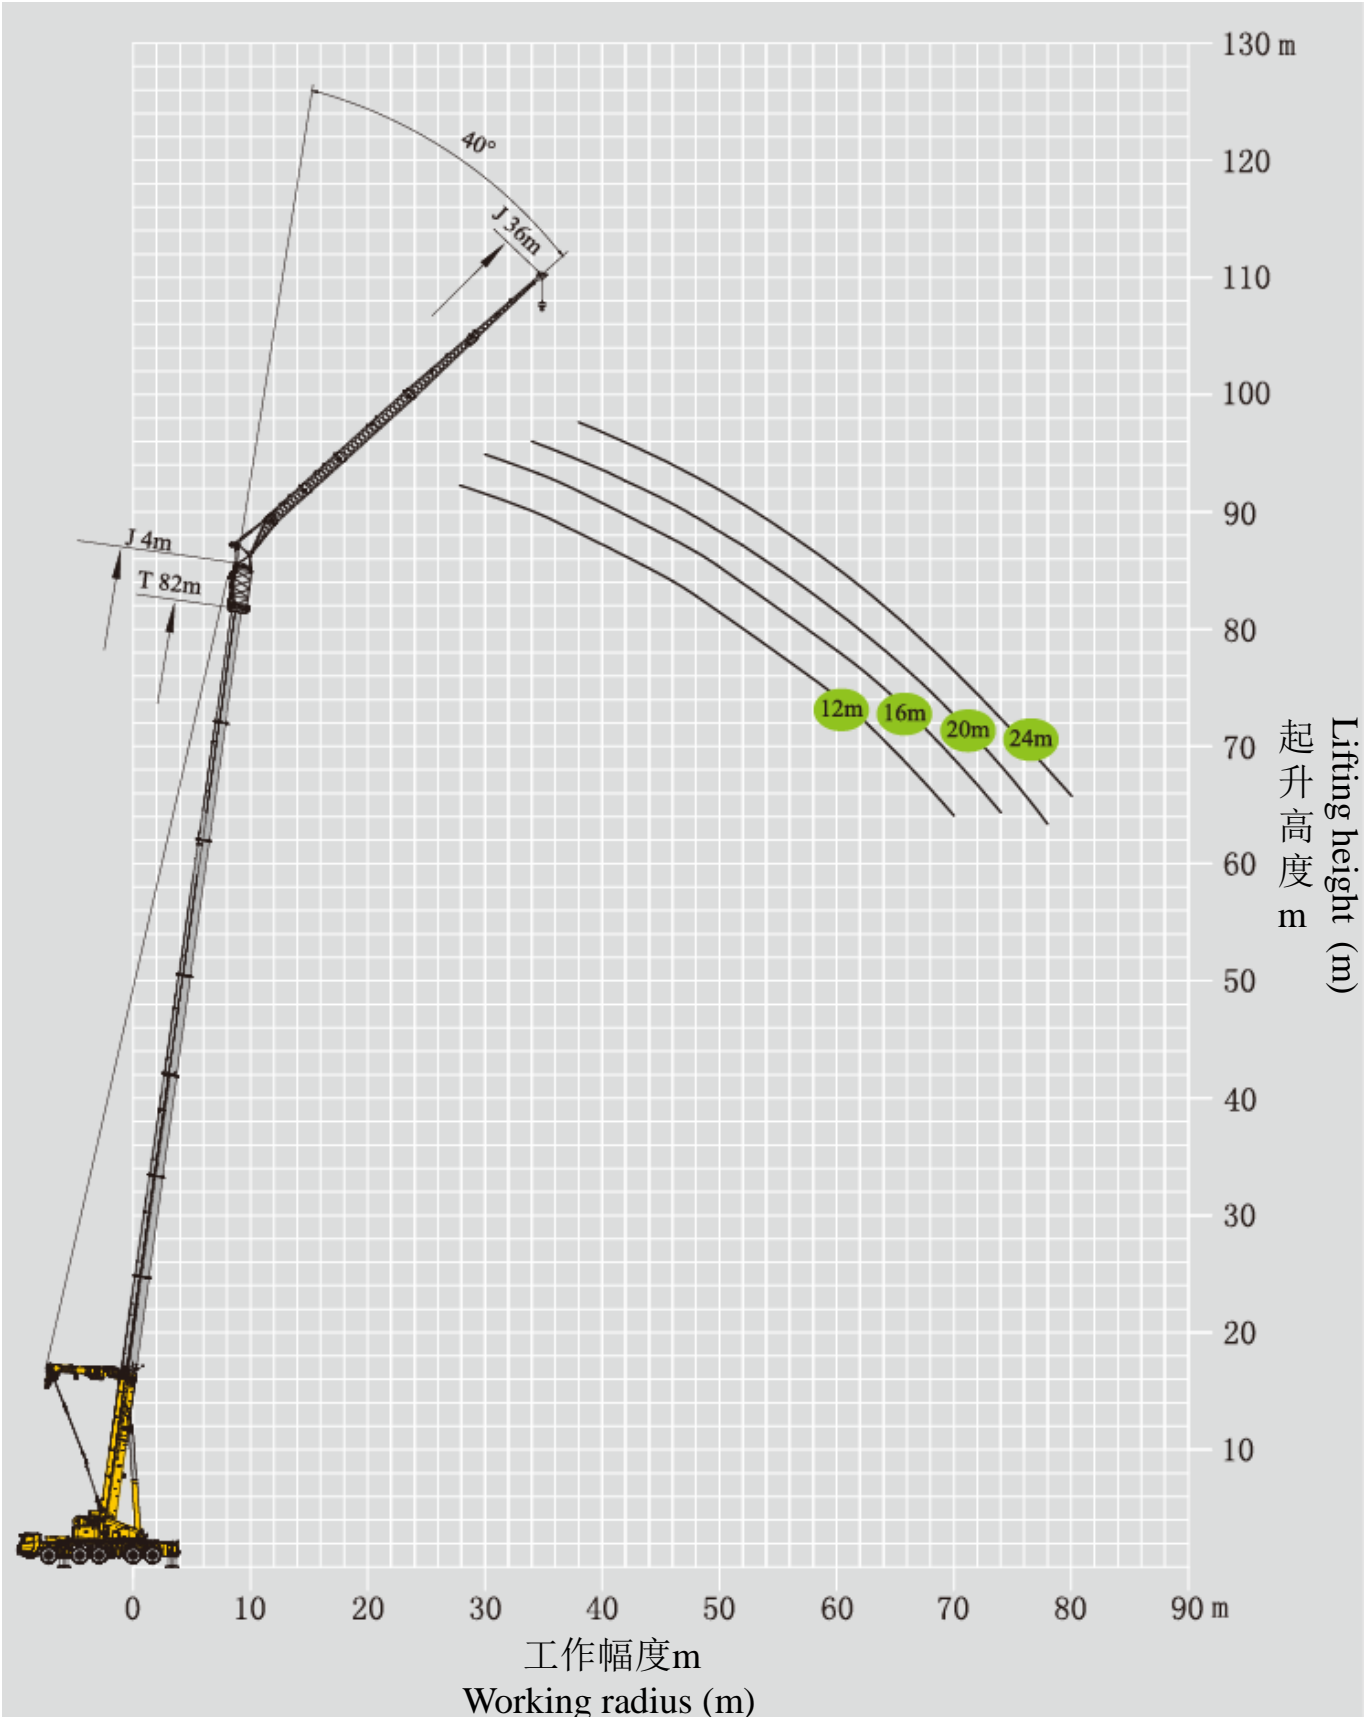

起重性能表

Lifting capacities

T 63.1~82.0m

m	60.5-80.0m T	4m	12m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
	12	12	12	12	12	12	
20	8.6						20
22	8.5	8.4					22
24	8.4	8.2	8.1				24
26	8.2	8.0	7.8	7.6			26
28	8.2	7.8	7.6	7.4	5.4		28
30	7.9	7.7	7.4	7.2	5.4		30
32	7.7	7.5	7.4	7.0	5.3		32
34	7.5	7.3	7.1	6.9	5.2		34
36	7.3	7.1	7.0	6.9	5.0		36
38	7.1	7.0	6.9	6.7	5.0		38
40	7.0	6.9	6.7	6.5	4.9		40
42	6.8	6.6	6.5	6.4	4.8		42
44	6.7	6.6	6.5	6.3	4.7		44
46	6.5	6.4	6.3	6.1	4.6		46
48	6.3	6.2	6.1	6.0	4.5		48
50	6.3	6.2	6.1	5.9	4.4		50
52	5.7	5.9	5.9	5.7	4.2		52
54	5.0	5.2	5.5	5.6	4.1		54
56	4.3	4.6	4.9	5.2	3.9		56
58		4.0	4.2	4.6	3.8		58
60		3.4	3.7	4.0	3.6		60
62			3.2	3.5	3.4		62
64				3.0	3.0		64
66				2.5	2.6		66
68					2.2		68
70					1.8		70
组合C	2222111	2222211	2222221	2222222	3333333		组合C
倍率n	1	1	1	1	1		倍率n
吊钩	11t	11t	11t	11t	11t		吊钩
Hook							Hook

起重性能表

Lifting capacities

T 63.1~82.0m

m	60.5-80.0m T	4m	20m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
20	20	20	20	20	20	20	
26	3.2						26
28	3.2	3.2					28
30	3.1	3.2	3.1				30
32	3.0	3.1	3.1	3.1			32
34	3.0	3.1	3.0	3.0	3.1		34
36	3.0	3.0	3.0	3.0	3.0	2.4	36
38	3.0	3.0	2.9	2.9	2.9	2.4	38
40	2.9	2.9	2.9	2.9	2.9	2.3	40
42	2.9	2.9	2.9	2.9	2.9	2.3	42
44	2.8	2.8	2.8	2.9	2.9	2.3	44
46	2.8	2.8	2.8	2.8	2.8	2.2	46
48	2.8	2.8	2.8	2.8	2.8	2.2	48
50	2.8	2.7	2.8	2.8	2.8	2.2	50
52	2.8	2.7	2.7	2.8	2.8	2.2	52
54	2.7	2.7	2.7	2.7	2.7	2.2	54
56	2.7	2.7	2.7	2.7	2.7	2.2	56
58	2.7	2.6	2.7	2.7	2.7	2.2	58
60	2.7	2.6	2.6	2.6	2.6	2.2	60
62	2.7	2.6	2.6	2.6	2.6	2.1	62
64	2.6	2.6	2.6	2.6	2.6	2.1	64
66		2.3	2.6	2.6	2.6	2.1	66
68		2.1	2.3	2.6	2.6	2.1	68
70			2.0	2.3	2.3	2.1	70
72				2.0	2.0	2.1	72
74					1.9	2.0	74
76						1.6	76
78						1.3	78
组合C	2222111	2222211	2222221	2222222	3333333	组合C	
倍率n	1	1	1	1	1	倍率n	
吊钩	11t	11t	11t	11t	11t	吊钩	
Hook						Hook	

起重性能表

Lifting capacities

T 63.1~82.0m















m	60.5-80.0m T	4m	24m	9.19m×8.3m	360°	90t	m
	63.1+4	67.6+4	72.1+4	76.5+4	82+4		
30	2.5						30
32	2.4	2.4					32
34	2.4	2.4	2.4				34
36	2.3	2.4	2.3	2.3			36
38	2.3	2.3	2.3	2.3	1.8		38
40	2.3	2.3	2.3	2.3	1.8		40
42	2.2	2.3	2.2	2.2	1.8		42
44	2.2	2.2	2.2	2.2	1.8		44
46	2.2	2.2	2.2	2.2	1.7		46
48	2.1	2.2	2.1	2.2	1.7		48
50	2.1	2.1	2.1	2.2	1.7		50
52	2.1	2.1	2.1	2.1	1.6		52
54	2.1	2.1	2.0	2.1	1.6		54
56	2.0	2.1	2.0	2.1	1.6		56
58	2.0	2.1	2.0	2.1	1.6		58
60	2.0	2.0	2.0	2.1	1.6		60
62	2.0	2.0	2.0	2.0	1.6		62
64	2.0	2.0	2.0	2.0	1.6		64
66	2.0	2.0	1.9	2.0	1.6		66
68	2.0	2.0	1.9	2.0	1.6		68
70		1.9	1.9	1.9	1.6		70
72		1.6	1.8	1.9	1.6		72
74			1.5	1.8	1.6		74
76				1.6	1.6		76
78				1.6	1.6		78
80					1.3		80
组合C	2222111	2222211	2222221	2222222	3333333		组合C
倍率n	1	1	1	1	1		倍率n
吊钩	11t	11t	11t	11t	11t		吊钩
Hook							Hook

符号标识

Description of symbols




常规标识

General symbols

	支腿 Outriggers		车桥 Axle
	工作幅度 Radius		行驶速度 Driving speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	吊臂长度 Boom length		轮胎 Tires
	吊钩 Hook block		平衡重 Counterweight
	360°全回转 360° operation of the boom		上车 Superstructure
	卷扬 Winch		底盘 Chassis

起重作业标识

Crane specific symbols

	主臂 Boom		副臂 Jib
	主臂加长节 Boom extension		

主要技术参数表

Table of main technical parameters

类别 Category	项目 Item	单位 Unit	参数Parameter	
尺寸参数 Dimensions	外形尺寸 (长×宽×高) Dimensions (length×width×height)	mm	15180×3000×4000	
	轴距 Wheel base	mm	2650+1650+2900+1650	
	轮距 (前/后) Track (Front/ Rear)	mm	2540/2540/2540/2540/2540	
	前悬/后悬 Front/ Rear overhang	mm	2664/2245	
	前伸/后伸 Front/ Rear extension	mm	1421/0	
重量参数 Weight	最大允许总质量 Max. permissible total weight	kg	54990	
	轴荷 Axle load	一轴 1st axle	kg	10290
		二轴 2nd axle	kg	10350
		三轴 3rd axle	kg	10350
		四轴 4th axle	kg	12000
	五轴 5th axle	kg	12000	
动力参数 Power	发动机型号 Engine model	—	WP13.530E501	
	额定功率/转速 Rated power/rpm	kW/(r/min)	390/1900	
	最大输出扭矩/转速 Max. output torque/rpm	N.m/(r/min)	2500/ (1000~1400)	
行驶参数 Travel	行驶速度 Travel speed	最高车速 Max. travel speed	km/h	≥80
		最低稳定车速 Min. stable travel speed	km/h	1 ~ 1.5
	转弯直径 Turning diameter	最小转弯直径 Min. turning diameter	m	≤18.5
		臂头最小转弯直径 Min. turning diameter at boom tip	m	≤21
	最小离地间隙 Min. ground clearance	mm	307	
	接近角 Approach angle	°	18	
	离去角 Departure angle	°	14	
	制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h)	m	≤10	
	最大爬坡能力 Max. grade ability	%	60	
	百公里油耗 Fuel consumption per 100 km	L	70	
	加速行驶机外噪声 Exterior noise level	dB(A)	≤85	
	驾驶员耳旁噪声 Noise level at seated position	dB(A)	≤90	

主要技术参数表

Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter	
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity		t	300*	
	最小额定工作幅度 Min. rated working radius		m	2.7	
	转台尾部回转半径 Turning radius at turntable tail	平衡重处 Counterweight	mm	5250	
	最大起重力矩 Max. load moment	基本臂 Base boom	kN.m	7997	
		最长主臂 Fully-extended boom	kN.m	4065	
		最长主臂+副臂 Fully-extended boom + Jib	kN.m	1229	
	支腿跨距 Outrigger span	纵向 Longitudinal	m	9.19	
		横向 Lateral	m	8.3	
	起升高度 Hoist height	基本臂 Base boom	m	13	
		最长主臂 Fully-extended boom	m	81	
		最长 (主臂+副臂) Fully-extended boom + Jib	m	118	
	起重臂长度 Boom length	基本臂 Base boom	m	13.8	
		最长主臂 Fully-extended boom	m	82	
		最长 (主臂+副臂) Fully-extended boom + Jib	m	120.5	
副臂安装角 Jib offset angle		°	0、20、40		
工作速度参数 Working speed	起重臂起臂时间 Boom raising time		s	≤60	
	起重臂全伸时间 Boom fully extended time		s	≤850	
	最大回转速度 Max. slewing speed		r/min	≥1.5	
	支腿收放时间 Outrigger extending and retracting time	水平支腿 (单边收放) Outrigger beam (Extending and retracting at one side)	收 Retracting	s	≤40
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤40
			放 Extending	s	≤80
起升速度 (单绳,第四层,空载) Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch	空载 No load	m/min	≥130	
噪声 Noise	机外辐射 Exterior noise level		dB (A)	≤111	
	司机位置处 Noise level at seated position		dB (A)	≤85	

注: *起重能力等级Capacity class

注意事项 Notes

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits, which means the percentage of boom sections extended.



地址: 江苏省徐州市经济技术开发区高新路68号
Add: No. 68 Gaoxin Road,
Economic and Technological Development Zone,
Xuzhou, Jiangsu, China
电话(Tel): +86-516-83462242/83462350
质量监督电话(Quality Inquiry Tel): +86-516-
87888268
备件电话(Spare Parts Tel): +86-516-83461542
邮编(Post Code): 221004
网址(Web): www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.